



BASO 1.5 LOUVER

DIRECT / INDIRECT

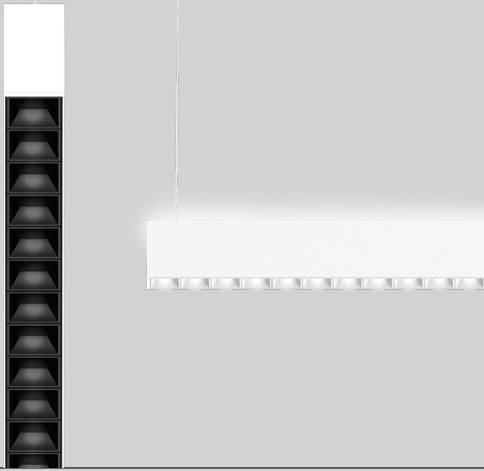

PERFORMANCE

- Up to 118lm/W efficiency
- 400 / 600 / 800lm/ft
- CRI > 80 & CRI > 90
- IC & Damp rated
- UGR < 17




MOUNTING

Pendant



MULTIPLE LENS COMBINATIONS

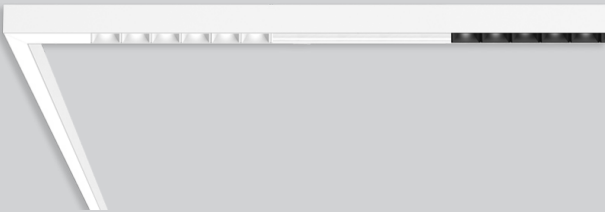


Contact customer service with a drawing of your request.

INNOVATIONS



[link to page](#)

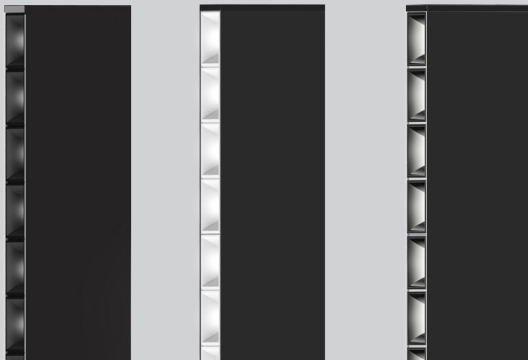

Catalog Number Example

BASO 1.5-PAT-WH-LBM-BW-30K-C80-UNV-010V-SEN-400LF-0350LF-NLC-ST-24IN

A RANGE

BASO 1.5 B A S O 1 . 5

B MOUNTING

Pendant P D T
 Pendant in-line ACT T-BAR P A T
 Pendant in-line ACT SLOT P A S
 Pendant ACT center tile P A C

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black power feeds or junction box covers, please contact customer service

C COLOR

White W H
 Black B L
 Gray G R
 Custom color RAL X X

trimless version available in white only

D LENS

Louver black matte L B M
 Louver black gloss L B G
 Louver white matte L W M
 Louver white gloss L W G
 Louver chrome L C H

E LENS INDIRECT

Batwing indirect B W

F CCT

3000K 3 0 K
 3500K 3 5 K
 4000K 4 0 K
 Custom CCT X X K

G CRI

CRI > 80 C 8 0
 CRI > 90 C 9 0

H VOLTAGE

120V / 277V U N V

I DIMMING

0-10V 1% 0 1 0 V
 Lutron EcoSystem L E S 1

Quantum, Vive, GRAFIK Eye, HomeWorks

Power over ethernet P O E C

consult customer service for compatibility

Custom dimming X X X X

consult customer service for compatibility

J SENSOR (optional)

Integrated Sensor S E N
 consult customer service for sensor request

K OUTPUT LM/FT DOWN

400 lm/ft ↓ 0 4 0 0 L F
 600 lm/ft ↓ 0 6 0 0 L F
 800 lm/ft ↓ 0 8 0 0 L F
 Custom lm/ft X X X X L F
 custom lumen up to 800 lm/ft

L OUTPUT LM/FT UP

400 lm/ft ↑ 0 4 0 0 L F
 600 lm/ft ↑ 0 6 0 0 L F
 800 lm/ft ↑ 0 8 0 0 L F
 Custom lm/ft X X X X L F
 custom lumen up to 1000 lm/ft

M CIRCUIT / EM

Single circuit *
 EMC night light circuit N L C
 Dual Circuit D C
 * leave blank

N SHAPE / PATTERN

Linear / straight S T

O DIMENSIONS IN INCH

Linear 2' 2 4 I N
 400 lm/ft Linear 4' 4 8 I N
 600 lm/ft Linear 6' 7 2 I N
 800 lm/ft Linear 8' 9 6 I N
 Linear custom # # # I N

custom combinations including opal lens available, please contact customer service with a drawing of your request

P CERTIFICATION (optional)


Red List Approved R L A

BASO
 basolighting.com
 xalusa.com

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO 1.5 LOUVER DIRECT								
e LED	4' linear	30K, 35K, 40K	16.4W	1600lm	100% down	400lm/ft	67%	118lm/W
	8' linear		32.8W	3200lm				
e ² LED	4' linear	30K, 35K, 40K	25.6W	2400lm	100% down	600lm/ft	67%	113lm/W
	8' linear		51.2W	4800lm				
e ²⁺ LED	4' linear	30K, 35K, 40K	35W	3200lm	100% down	800lm/ft	67%	108lm/W
	8' linear		70W	6400lm				
		LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO 1.5 LOUVER INDIRECT								
e LED	4' linear	30K, 35K, 40K	9W	1000lm	100% up	250lm/ft	72%	111lm/W
	8' linear		18W	2000lm				
e ²⁺ LED	4' linear	30K, 35K, 40K	14W	1400lm	100% up	350lm/ft	72%	100lm/W
	8' linear		28W	2800lm				

Multiple lens combinations available

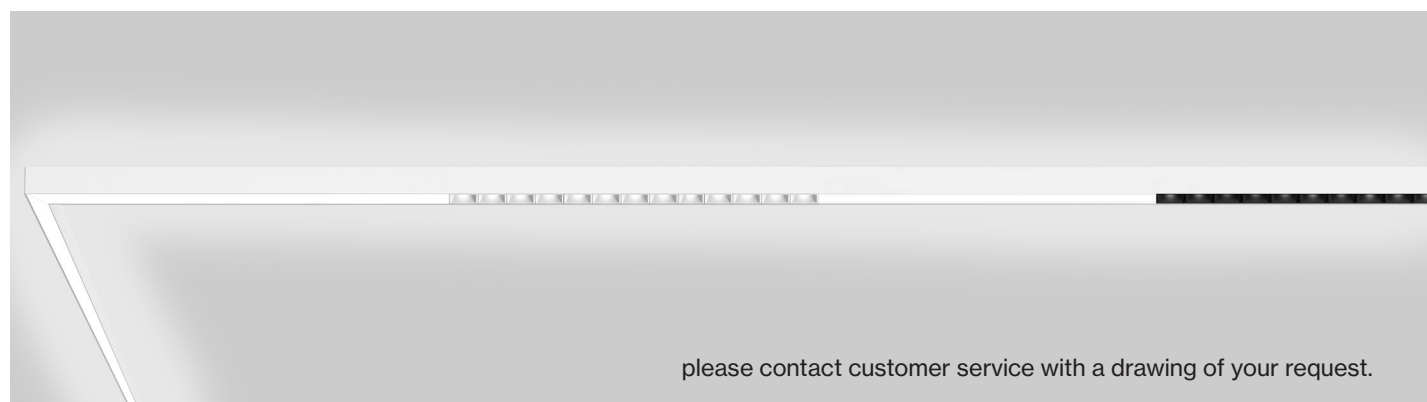

Patterns top view

LINEAR

A	FIXTURES	CODE
48"	1 × 4' linear	ST - 0 4 FT
96"	1 × 8' linear	ST - 0 8 FT
144"	3 × 4' linear	ST - 1 2 FT

