



DOT SQ RECESSED



PERFORMANCE



- Up to 90lm/W
- CRI > 90
- Spotlight 360° rotatable & 35° tiltable



MOUNTING

Recessed with trim

Recessed trimless



MAKE YOUR ROOM STAND OUT



Catalog Number Example

DOT-SQ-RTR-FLSH-WH-1L-27K-C90-NOACC-SP-R19D-UNV-010V-1500LM-NIC

A RANGE

DOT-SQ _____ DOT SQ

B MOUNTING

Recessed with trim R T R
Recessed trimless R T L

C MOUNTING DEPTH

Regressed 5/8" R G 5 8

D COLOR

White W H
Black B L

E LAMP

1 Lamp 1 L
2 Lamps 2 L
3 Lamps 3 L

F CCT

2700 K 2 7 K
3000 K 3 0 K
3500 K 3 5 K
4000 K 4 0 K

G CRI

CRI > 80 C 8 0
CRI > 90 C 9 0

H REFLECTOR

Spot 19° S P - R 1 9 D
Medium 26° M D - R 2 6 D
Flood 37° F L - R 3 7 D
Wide flood 62° W I - R 6 2 D

I ACCESORY

No Accesory _____
Honeycomb Louver H C O M B

J VOLTAGE

120V / 277V _____ U N V

K DIMMING

0-10V 1% _____ 0 1 0 V
Hi-lume 1% EcoSystem L D E 1

L OUTPUT PER LAMP

1000lm 10.7W 1 0 0 0 L M
1500lm 15.8W 1 5 0 0 L M
1900lm 20.2W 1 9 0 0 L M

M HOUSING TYPE


T-Rod / non IC-rated T R - N I C
T-Rod / IC-rated T R - I C R
Chicago Plenum (CCEA) T R - C C E A
Remote Housing R E M

N MOUNTING (HOUSING)

No extra mounting hardware * (only for REM)
Hanger bars adjustable 14"-18" (N/A for REM) H B 1 4 1 8
Hanger bars adjustable 14"-18" for T-Grid (N/A for REM) H G 1 4 1 8
Remote Housing R E M

Dimensions

Trim

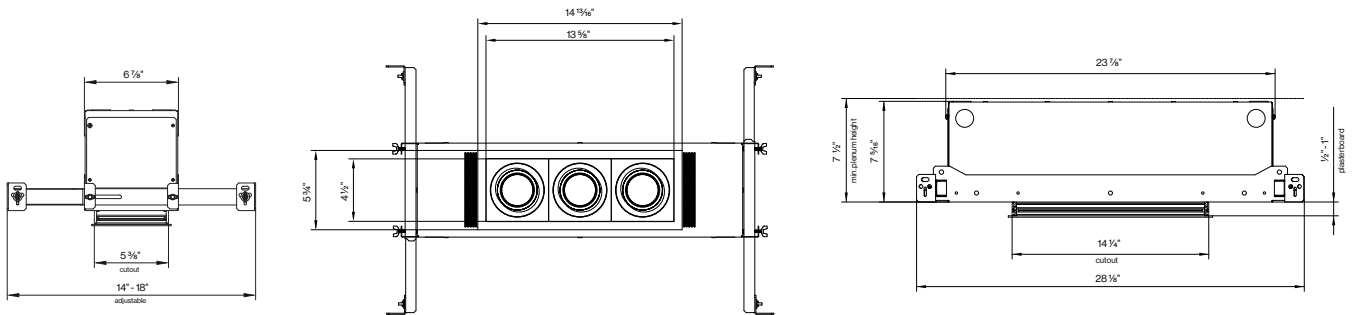

Trimless

