



# HEX

## ACOUSTIC INDIRECT

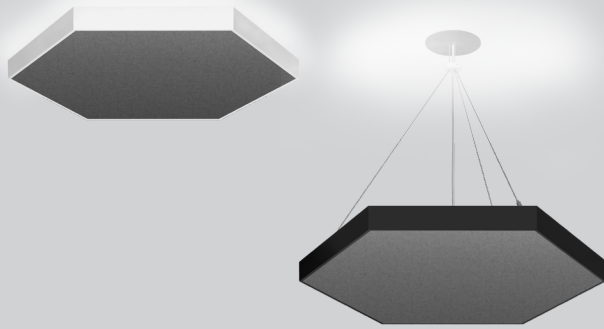


### PERFORMANCE

- Welded aluminium fixture housing
- Up to 125 lm/W
- CRI > 80 or CRI > 90
- Acoustic lay-in cover




### MOUNTING


Surface



Pendant



### MULTI COMBINATIONS

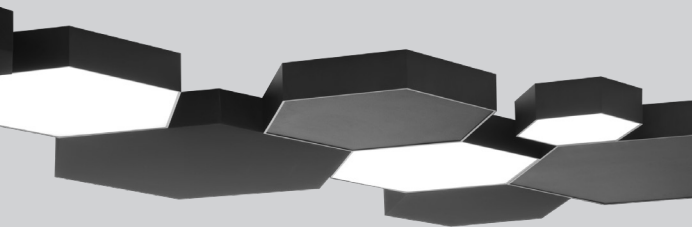


### ONE CLICK INSTALLATION

Mounting & electrical connection with one click



[link to video](#)

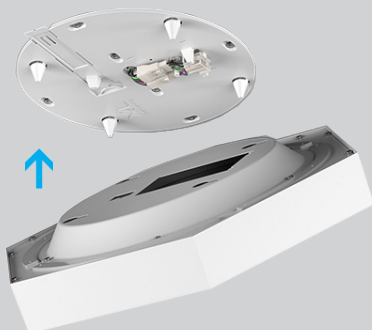

### Catalog Number Example

HEX-A/I-LI-SUR-BL-WH-35K-C90-UNV-010V-02900L-DM-2FT

#### A RANGE

HEX Acoustic      H E X - A / I

#### H VOLTAGE

Universal 120/277      U N V  
347 V (only 0-10 V dim)      3 4 7

#### B SUB CATEGORY

Lay-in acoustic      L I

#### I DIMMING

0-10V 1%      0 1 0 V  
Lutron EcoSystem      L D E 1  
Quantum, Vive, GRAFIK Eye,  
HomeWorks

#### C MOUNTING

Surface      S U R  
Pendant      P D T

#### J OUTPUT LM

○ 1 1/2'	790lm	0 2 9 0 0 L
	1090lm	0 4 1 0 0 L
○ 2'	960lm	0 4 0 0 0 L
	1310lm	0 5 4 0 0 L
	1330lm*	0 6 5 0 0 L
○ 3'	1780lm	0 6 8 0 0 L
	1780lm	0 7 8 0 0 L
	2080lm	1 0 1 0 0 L
	2910lm	1 3 8 0 0 L

#### D COLOR HOUSING

White      W H  
Black      B L  
Gray      G R

#### E COLOR ACOUSTIC

White      W H  
Light gray      L G  
Anthracite gray      A R

item code matches with coordinating HEX  
Direct/Indirect fixture

\*only 0-10V and DALI dimming available

#### F CCT

3000K      3 0 K  
3500K      3 5 K  
4000K      4 0 K

#### K CIRCUIT / EM

Single circuit      \*  
\*leave blank

#### G CRI

CRI > 80      C 8 0  
CRI > 90      C 9 0

#### L DIAMETER IN FT

○ 1 1/2'	DM - 1 . 5 F T
○ 2'	DM - 2 F T
○ 3'	DM - 3 F T

**BASO**  
basolighting.com  
xalusa.com


Technical data

SIZE TYPE	LED COLOR TEMPERATURE	LIGHT DISTRIBUTION	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
○ 1½' gray	30K, 35K	100% up	780lm	86%	102lm/W
	40K		810lm		107lm/W
	30K, 35K	100% up	1090lm		87lm/W
	40K		1130lm		91lm/W
○ 2' gray	30K, 35K	100% up	960lm	86%	114lm/W
	40K		1000lm		118lm/W
	30K, 35K	100% up	1310lm		107lm/W
	40K		1360lm		111lm/W
	30K, 35K	100% up	1330lm		100lm/W
○ 3' gray	40K		1380lm	86%	104lm/W
	30K, 35K	100% up	1780lm		119lm/W
	40K		1850lm		124lm/W
	30K, 35K	100% up	1780lm		117lm/W
	40K		1850lm		121lm/W
	30K, 35K	100% up	2080lm		111lm/W
	40K		2170lm		115lm/W
30K, 35K	100% up	2800lm	102lm/W		
	40K		2910lm	106lm/W	

Accessory

SUSPENSION SET < 36 INCH

3-piece barrel mount set 6 9 8 - 0 9 8 - 0 5 1 4 0

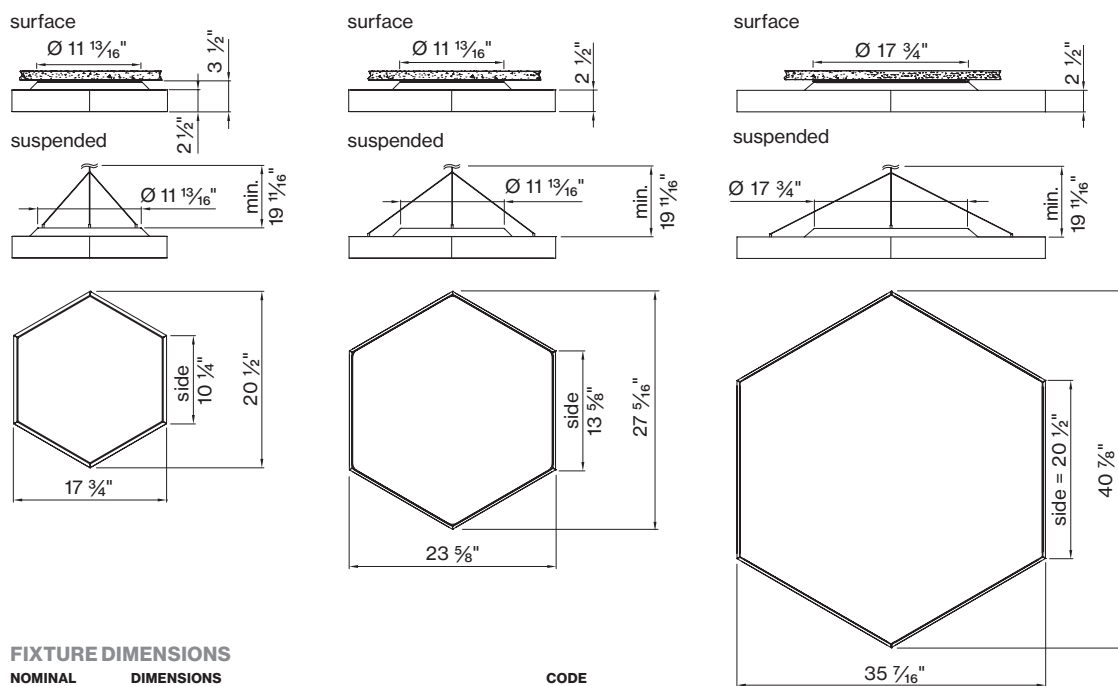

FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
○ 1½'	○ 17 ¾" / h 2 ½"	DM - 1 . 5 F T
○ 2'	○ 23 ⅝" / h 2 ½"	DM - 2 F T
○ 3'	○ 35 ⅞" / h 2 ½"	DM - 3 F T

HEX mounting instructions

Get access to the HEX mounting instructions faster by scanning the QR code.



<https://www.xalusa.com/resources/cut-sheets/hex>