




Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT									
e LED									
	4' linear	35K	17.5W	1820lm	100% down	455lm/ft	-	74%	106lm/W
	6' linear		25.8W	2740lm					
	8' linear		34.4W	3650lm					
e ² LED									
	4' linear	35K	29.5W	3010lm	100% down	750lm/ft	-	74%	102lm/W
	6' linear		44.2W	4510lm					
	8' linear		59W	6020lm					

Patterns top view

LINEAR


A	FIXTURES	CODE
48"	1'x 4' linear	ST - 0 4 FT
96"	1'x 8' linear	ST - 0 8 FT
144"	8'+ 4' linear	ST - 1 2 FT




DIMENSIONS

BASO 2.5


SURFACE
direct




linear 4ft / 8ft

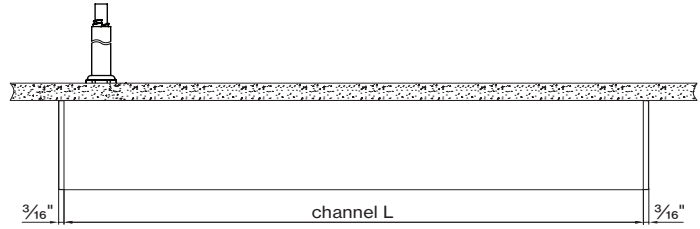


PENDANT
direct



direct / indirect




linear 4ft / 8ft

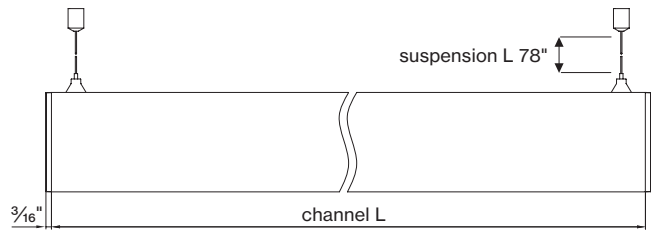


BASO 2.5 SPECIALITY MOUNTING



SURFACE
in-line ACT TBAR




SURFACE
in-line ACT SLOT




SURFACE
ACT center tile

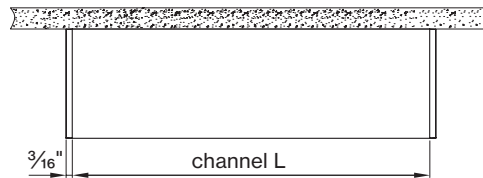



PENDANT
ACT TBAR



PENDANT
in-line ACT SLOT



PENDANT
ACT center tile

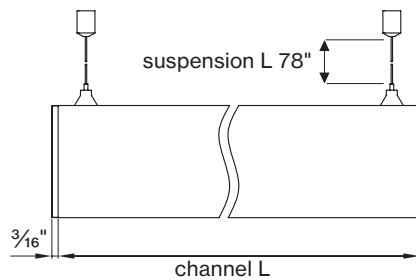

BASO mounting instructions

Get access to the BASO 2.5 mounting instructions faster by scanning the QR code.
www.xalusa.com/resources/mounting-instructions/baso

