






**Technical data**

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>BASO DIRECT</b>									
e LED									
	4' linear	35K	18W	2000lm	100% down	500lm/ft	-	76%	111lm/W
	6' linear		27W	3000lm					
	8' linear		36W	4000lm					
e <sup>2</sup> LED									
	4' linear	35K	36W	3820lm	100% down	955lm/ft	-	76%	106lm/W
	6' linear		54W	5730lm					
	8' linear		72W	7640lm					

**Patterns top view**

**LINEAR**



A	FIXTURES	CODE
48"	1'x 4' linear	ST - 0 4 FT
96"	1'x 8' linear	ST - 0 8 FT
144"	8'+ 4' linear	ST - 1 2 FT





DIMENSIONS

**BASO 4.0**


RECESSED trimless

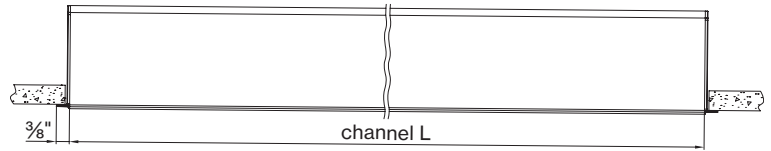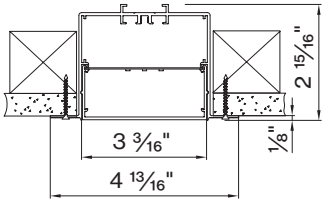


RECESSED with trim

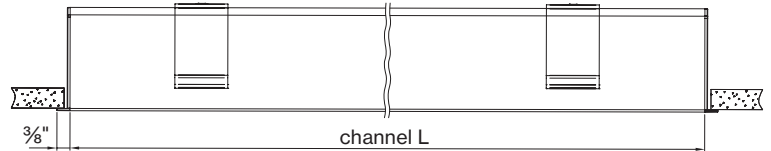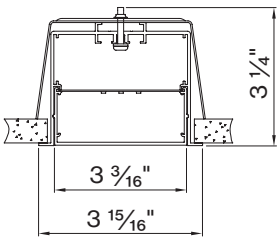


1/16" T-GRID




1/16" Slot Grid (any brand)



1/16" Grid (any brand) 4ft / 15/16" Grid (any brand) 4ft

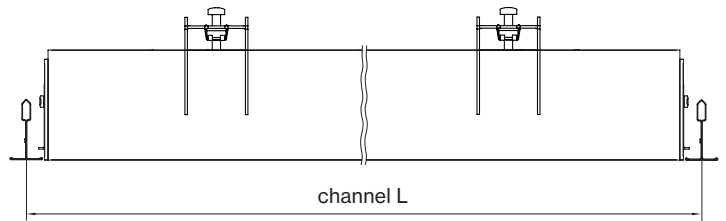

15/16" T-GRID



**BASO mounting instructions**

Get access to the BASO 4.0 mounting instructions faster by scanning the QR code.

[www.xalusa.com/resources/mounting-instructions/baso](http://www.xalusa.com/resources/mounting-instructions/baso)

