


# BASO 4.0 DIRECT




### PERFORMANCE

- Up to 111lm/W efficiency
- 500 / 955 lm/ft
- CRI > 80 & CRI > 90
- Damp rated



### MOUNTING

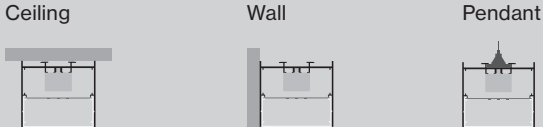


### FIELD-CUTTABLE FLEX

Down to 1/16"



[link to video](#)

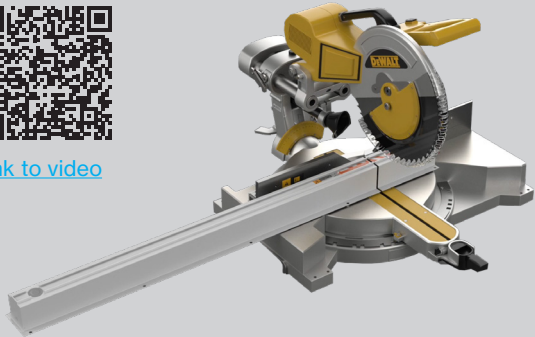

### 10 Business Days for all QuickShip items

- Maximum quantity: 400'
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard XAL terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.



Declare



**5** YEAR  
limited  
led warranty

### Catalog Number Example

BASO4.0-PDT-BL-30K-010V-955LF-ST-96IN

#### A RANGE

**QS** BASO 4.0 BASO4.0

#### F OUTPUT LM/FT

**QS** 500lm/ft 100% ↓ 0 5 0 0 L F  
**QS** 955lm/ft 100% ↓ 0 9 5 5 L F

#### B MOUNTING

**QS** Surface SUR  
**QS** Pendant PDT

#### G CIRCUIT / EM

**QS** Single circuit \*

#### C COLOR

**QS** White WH  
**QS** Black BL

#### H SHAPE / PATTERN

**QS** Linear / straight ST  
**QS** Linear / straight + flex inset S F  
includes 1ft. field-cuttability section; only available for 4' and 8' segments

#### D CCT

**QS** 3000 K 3 0 K  
**QS** 3500 K 3 5 K

#### K DIMENSIONS IN INCH

**QS** Linear 4' 4 8 I N  
**QS** Linear 6' 7 2 I N  
**QS** Linear 8' 9 6 I N  
**QS** Custom length XXFT  
(QS in 2' increments only)



#### E DIMMING

**QS** 0-10V 1% 0 1 0 V

**BASO**  
basolighting.com  
xalusa.com




**Technical data**

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>BASO DIRECT</b>									
<b>e LED</b>									
	4' linear	35K	18W	2000lm	100% down	500lm/ft	-	76%	111lm/W
	6' linear		27W	3000lm					
	8' linear		36W	4000lm					
<b>e<sup>2</sup> LED</b>									
	4' linear	35K	36W	3840lm	100% down	955lm/ft	-	76%	106lm/W
	6' linear		54W	5730lm					
	8' linear		72W	7680lm					

**Patterns top view**

**LINEAR**



A	FIXTURES	CODE
48"	1'× 4' linear	ST - 0 4 FT
96"	1'× 8' linear	ST - 0 8 FT
144"	8' + 4' linear	ST - 1 2 FT



DIMENSIONS

**BASO 4.0**




SURFACE direct

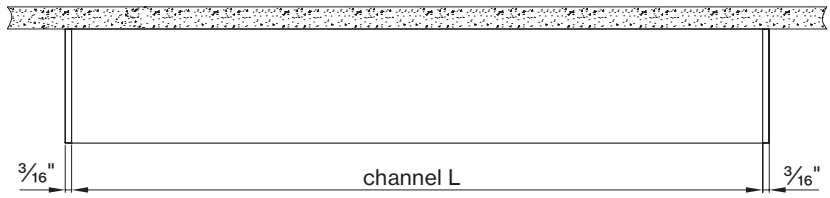

PENDANT

direct

direct / indirect

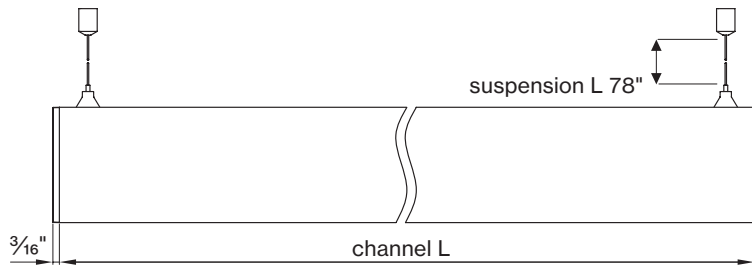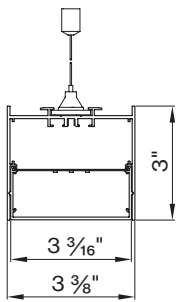

**BASO mounting instructions**

Get access to the BASO 4.0 mounting instructions faster by scanning the QR code.

[www.xalusa.com/resources/mounting-instructions/baso](http://www.xalusa.com/resources/mounting-instructions/baso)

