




BASO 4.0

DIRECT/INDIRECT



PERFORMANCE



- Up to 117lm/W efficiency
- 500 / 955lm/ft
- CRI > 80 & CRI > 90
- Damp rated



MOUNTING

Wall

Pendant



10 Business Days for all QuickShip items

- Maximum quantity: 400'
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard XAL terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.



Declare.



5 YEAR
limited
led warranty

Catalog Number Example

BASO4.0-PDT-BL-30K-C80-UNV-010V-955LF-ST-96IN

A RANGE

QS BASO 4.0 BASO4.0

B MOUNTING

QS Pendant PDT

C COLOR

QS White WH
QS Black BL

E CCT

QS 3000K 30K
QS 3500K 35K

E CRI

QS CRI > 80 C80
QS CRI > 90 C90

F VOLTAGE

QS 120V / 277V UNV

G DIMMING

QS 0-10V 1% 010V

J OUTPUT LM/FT UP

QS 500lm/ft 100% ↓ 0500LF
QS 750lm/ft 100% ↓ 0750LF
QS 1200lm/ft 100% ↓ 1000LF
Custom lm/ft XXXXLF
custom lumen up to 1400 lm/ft

K OUTPUT LM/FT DOWN

QS 500lm/ft ↑ 0500LF
QS 750lm/ft ↑ 0750LF
QS 1000lm/ft ↑ 1000LF
Custom lm/ft XXXXLF
custom lumen up to 1000 lm/ft

I CIRCUIT / EM

QS Single circuit *

J SHAPE / PATTERN

QS Linear / straight ST

K DIMENSIONS IN INCH

QS Linear 4' 48IN
QS Linear 6' 72IN
QS Linear 8' 96IN
QS Custom length XXFT
(QS in 2' increments only)

BASO
basolighting.com
xalusa.com



Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT / INDIRECT									
e LED									
	4' linear	35K	17.5 W	2060 lm	40% down / 60% up	215 lm/ft	300 lm/ft	73 %	117 lm/W
	6' linear		26.3 W	2060 lm					
	8' linear		35 W	4120 lm					
	2' + 2' corner		17.5 W	2060 lm					
e² LED									
	4' linear	35K	33.8 W	3850 lm	40% down / 60% up	407 lm/ft	555 lm/ft	73 %	113 lm/W
	6' linear		50.7 W	5775 lm					
	8' linear		67.7 W	7690 lm					
	2' + 2' corner		33.8 W	3850 lm					

Patterns top view

LINEAR

A	FIXTURES	CODE
48"	1' x 4' linear	ST - 0 4 FT
96"	1' x 8' linear	ST - 0 8 FT
144"	8' + 4' linear	ST - 1 2 FT






DIMENSIONS

BASO 4.0

PENDANT direct

direct / indirect

linear 4ft

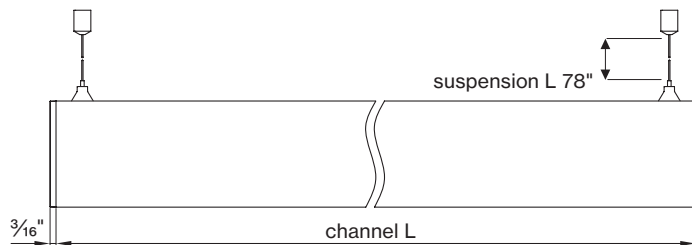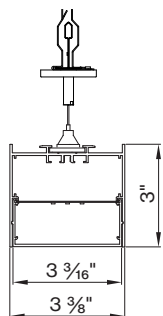

BASO mounting instructions

Get access to the BASO 4.0 mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions/baso

