




5 YEAR
limited
led warranty

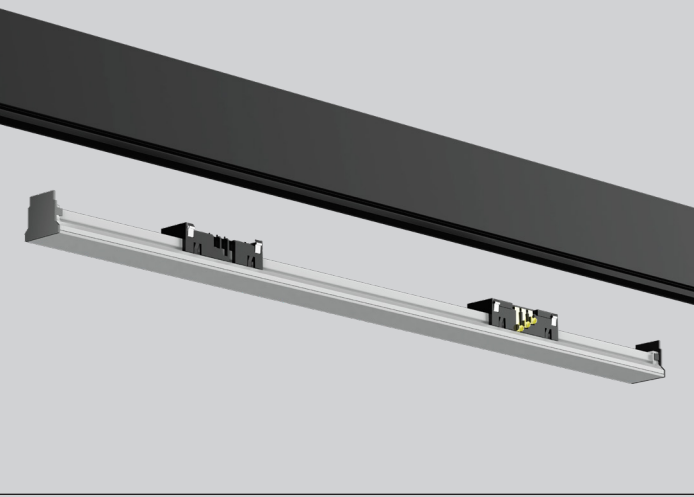

Catalog Number Example

RLINS-OPAL-1-BL-27K-C90-48V-010V-700LF-10F-04FT-EMC

A PRODUCT

R-LINE RLINS

I OUTPUT

300 lm/ft. 3W/ft. 300 L F - 3WF
700 lm/ft. 7W/ft. 700 L F - 7WF

B PRODUCT

Linear Opal OPAL

J DIMENSION

1 FT 0 1 FT
2 FT 0 2 FT
3 FT 0 3 FT
4 FT 0 4 FT

C INSET HEIGHT

1" Inset flush with R1/R3 track 1
2" Inset available Q1 2024 2

Optional Accessories

ships separately

D ADAPTER COLOR

Black BL
White WH

recommendation: adapter & track color should match

K EMERGENCY CIRCUIT

Emergency Circuit Brackets EMC
set of brackets to permanently secure linear opal inset

E CCT/CRI

2700K /CRI>90 27K - C90
3000K /CRI>90 30K - C90
3500K /CRI>90 35K - C90

Other Options

+ LOUVER

see R-Line Louver cutsheet

F VOLTAGE

48V low constant voltage 48V
remote driver required (see driver cutsheet)

+ CURVE OPAL

see R-Line Curve Opal cutsheet

G DIMMING

0-10V 1% dimming 010V

+ SPOT CURVE OPAL

see R-Line Spot cutsheet


H CIRCUIT

1 or 2 Circuit *
compatible with 1 or 2 track(see driver wiring diagram)
*leave empty

CONFIGURATIONS



R1 Track



R2 Track



R3 Track

COLORS



Black



White

DIMENSIONS

