





PERFORMANCE

- Up to 123 lm/W efficiency
- 27 K, 30 K, 35 K, 40 K
- CRI > 80 & CRI > 90




MOUNTING

Surface



Pendant




ONE CLICK INSTALLATION

Mounting & electrical connection with one click



[link to video](#)

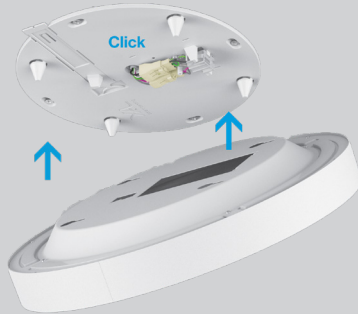

MAKE YOUR ROOM STAND OUT



Catalog Number Example

ROUND-SUR-BL-OP-40K-C80-UNV-010V-03000LF-DM-2FT

A RANGE

CS ROUND ROUND

B MOUNTING

CS Surface SUR
CS Pendant PDT

C COLOR

CS White WH
Black BL
Gray GR

D LENS

CS Opal cover OP

E CCT

CS 2700K 27 K
CS 3000K 30 K
3500K 35 K
4000K 40 K

F CRI

CS CRI > 80 C80
CS CRI > 90 C90

G VOLTAGE

CS 120V/277V UNV
347 V 347
only 0-10 V dim

H DIMMING

0-10V 1% 0 10 V
DALI DALI
Lutron EcoSystem LDE 1
Quantum, Vive, GRAFIK Eye,
HomeWorks
Power over ethernet POEC
consult customer service for compatibility

I OUTPUT LM

CS Ø 1 1/2' 2000lm 0 2 0 0 0 L
CS 3000lm 0 3 0 0 0 L
CS Ø 2' 3000lm 0 3 0 0 0 L
CS 4000lm 0 4 0 0 0 L
5000lm 0 5 0 0 0 L
CS Ø 3' 5000lm 0 5 0 0 0 L
CS 6000lm 0 6 0 0 0 L
8000lm 0 8 0 0 0 L
11000lm 1 1 0 0 0 L


J CIRCUIT / EM

CS Single circuit *
* leave blank
EMP EM battery pack EMB
Emergency battery pack only for 120 /
277 V option.

K DIAMETER IN FT

Ø 1 1/2' DM - 1 . 5 FT
Ø 2' DM - 2 FT
Ø 3' DM - 3 FT

Technical data


SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
 Ø 1 1/2' gray	30K, 35K	20W	2080lm	100% down	2080lm	85%	102lm/W
	40K		2160lm		2160lm		106lm/W
	30K, 35K	34W	2970lm		2970lm		87lm/W
	40K		3080lm		3080lm		90lm/W
Ø 2' gray	30K, 35K	27W	3030lm	100% down	3030lm	85%	111lm/W
	40K		3160lm		3150lm		116lm/W
	30K, 35K	39W	4060lm		4060lm		104lm/W
	40K		4220lm		4220lm		108lm/W
	30K, 35K	53W	5080lm		5070lm		96lm/W
	40K		5280lm		5270lm		100lm/W
Ø 3' gray	30K, 35K	43W	5010lm	100% down	5010lm	85%	116lm/W
	40K		5210lm		5210lm		121lm/W
	30K, 35K	53W	5970lm		5970lm		113lm/W
	40K		6210lm		6210lm		118lm/W
	30K, 35K	75W	7980lm		7970lm		107lm/W
	40K		8300lm		8290lm		111lm/W
	30K, 35K	112W	10900lm		10890lm		98lm/W
	40K		11340lm		11330lm		102lm/W

Accessory


SUSPENSION SET < 36 INCH

3-piece barrel mount set 698 - 098 - 05140


ROUND 1 1/2' surface

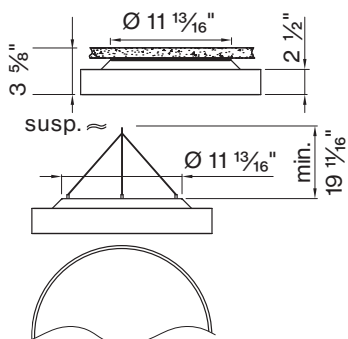

ROUND 2' surface

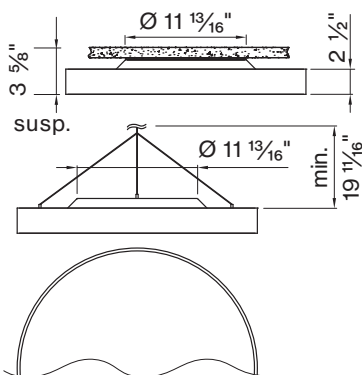

ROUND 3' surface

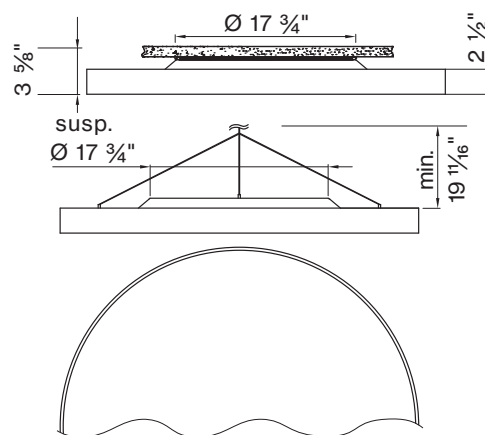

FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
Ø 1 1/2'	Ø 11 13/16" / h 3 1/2"	DM-1.5FT
Ø 2'	Ø 23 5/8" / h 3 1/2"	DM-2FT
Ø 3'	Ø 35 7/16" / h 3 1/2"	DM-3FT

ROUND mounting instructions

Get access to the ROUND mounting instructions faster by scanning the QR code.



www.xalusa.com/resources/mounting-instructions/round