

# T-LINE SPOT 3.0



**5** YEAR  
limited  
led warranty

## Catalog Number Example


TL-SPOT3.0-BL-30K-C90-120V-TRIA-2C-36D-2300LM-28W



## FEATURES

- Built-In Driver
- Triac Dimming
- Adjustable 350°
- 90° Tilt
- 2 Circuit-2 Neutral

## DIMENSIONS

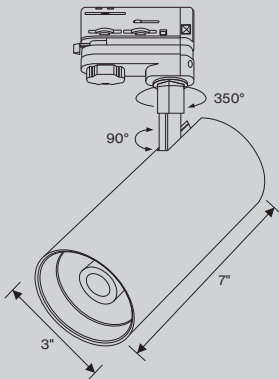

### A PRODUCT

T-LINE T L I N S

### E DIMMING

Triac Dimming T R I A

### B CONFIGURATION

SPOT S P O T 3 . 0

### F CIRCUIT

Two Circuit-Two Neutral 2 C

### C COLOR HEAD

White WH  
Black B L

### G BEAM SPREAD SPOT 3.0

15° spot 1 5 D  
24° medium 2 4 D  
36° flood 3 6 D  
60° ultra wide flood 6 0 D

### D CCT / CRI

3000 K / CRI > 90 3 0 K - C 9 0  
3500 K / CRI > 90 3 5 K - C 9 0


### H OUTPUT SPOT 3.0

2300 lm 28W 2 3 0 0 L M - 2 8 W


### D VOLTAGE

Line Voltage 1 2 0 V


#### 15° 28W 3000K RA80

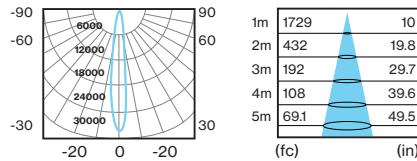


#### 24° 28W 3000K RA80

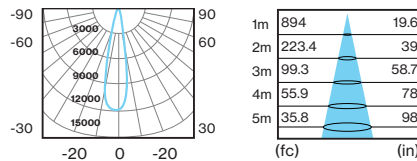

#### 36° 28W 3000K RA80

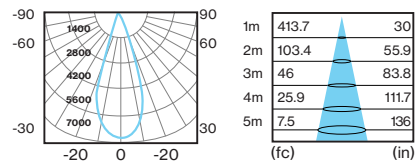

#### 60° 28W 3000K RA80

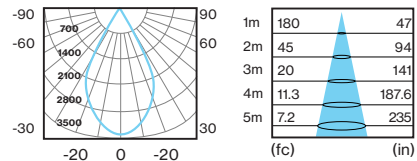

**BASO**  
basolighting.com  
xalusa.com