


BASO 1.5

WALL WASH




Catalog Number Example

BASO1.5-RTL-WH-WW-30K-C80-UNV-010V-0400LF-ST-48IN

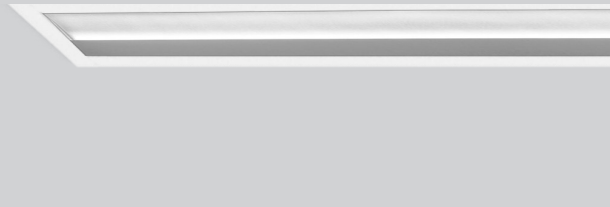

PERFORMANCE

- Up to 103lm/W efficiency
- 400 / 600 / 800lm/ft
- CRI > 80 & CRI > 90
- IC & Damp rated




MOUNTING


Recessed



BEAM DISTRIBUTION

Wall to ceiling ratio

Room height	H = 9 ft
Distance to wall	A = 3 ft
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8
Eye level 	4 - 5 ft

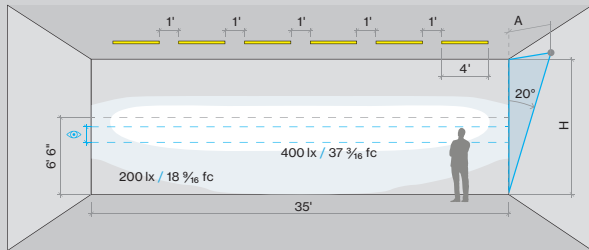

A RANGE

 BASO 1.5 BASO 1.5

B MOUNTING

 Recessed trimless	<u>RTL</u>
 Recessed with trim	<u>RTL</u>
 9/16" Grid (any brand)	<u>9GR</u>
 9/16" Slot Grid (any brand)	<u>9SG</u>
 15/16" Grid (any brand)	<u>15G</u>


C COLOR

 White	<u>WH</u>
 Black	<u>BL</u>

D LENS

 Asymmetric wall washer WW

E CCT

 3000K	<u>30K</u>
 3500K	<u>35K</u>

F CRI

 CRI > 80	<u>C80</u>
 CRI > 90	<u>C90</u>




G VOLTAGE

 120V / 277V UNV

H DIMMING

 0-10V 1% 010V



I OUTPUT LM/FT

 400lm/ft 100% \pm	<u>0400LF</u>
 600lm/ft 100% \pm	<u>0600LF</u>
 800lm/ft 100% \pm	<u>0800LF</u>

J CIRCUIT / EM





 Single circuit *

K SHAPE / PATTERN

 Linear / straight	<u>ST</u>
 Linear / straight + flex inset	<u>SF</u>

includes 1ft. field-cutable section; only available for 4' and 8' segments

L DIMENSIONS IN INCH

 Linear 4'	<u>48IN</u>
 Linear 6'	<u>72IN</u>
 Linear 8'	<u>96IN</u>
 Custom length	<u>XXFT</u>

(QS in 2' increments only)

10 Business Days for all QuickShip items

- Maximum quantity: 400'
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard XAL terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.

BASO
basolighting.com
xalusa.com

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT								
e LED	4' linear	30K, 35K	16W	1600lm	100% down	400lm/ft	67%	103lm/W
	6' linear		24W	2400lm				
	8' linear		32W	3200lm				
e ² LED	4' linear	30K, 35K	24W	2400lm	100% down	600lm/ft	67%	99lm/W
	6' linear		32W	3200lm				
	8' linear		48W	4800lm				
e ²⁺ LED	4' linear	30K, 35K	36W	3200lm	100% down	800lm/ft	67%	93lm/W
	6' linear		48W	4000lm				
	8' linear		72W	6400lm				

Patterns top view

LINEAR



A	FIXTURES	CODE
48"	1'x 4' linear	ST - 0 4 FT
96"	1'x 8' linear	ST - 0 8 FT
144"	8' + 4' linear	ST - 1 2 FT





DIMENSIONS

BASO 1.5 WALL WASHER


RECESSED trimless

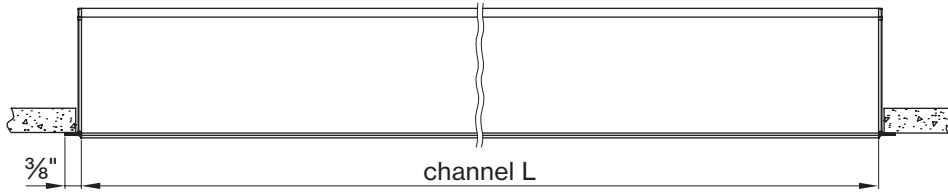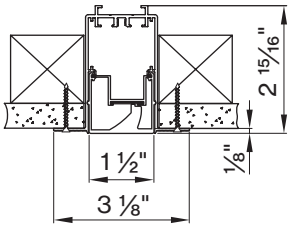


RECESSED with trim

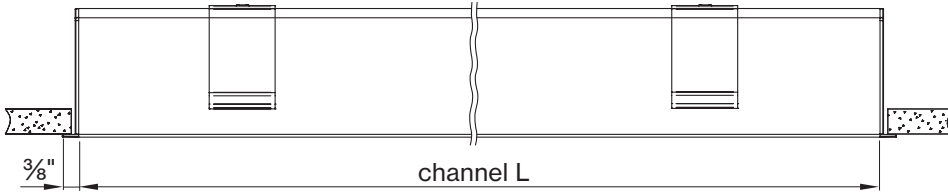


9/16" Grid (any brand)

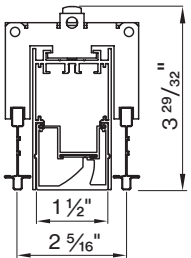


9/16" Grid (any brand) 4ft

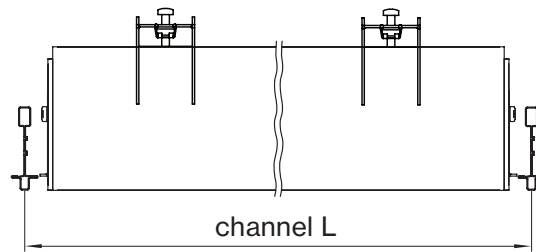

15/16" Grid (any brand)



15/16" Grid (any brand) 4ft

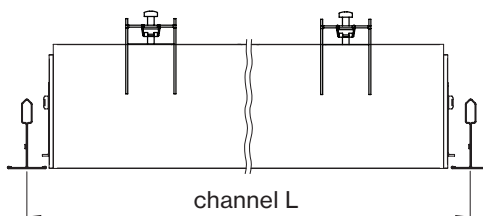

BASO mounting instructions

Get access to the BASO 1.5 WW mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions/baso

