





PERFORMANCE

- Up to 112lm/W efficiency
- 455 / 750lm/ft
- CRI > 80 & CRI > 90
- Damp rated



MOUNTING

Wall





10 Business Days for all QuickShip items

- Maximum quantity: 400'
- "QuickShip" must be clearly listed on PO.
- QuickShip items must be on Separate Purchase Order.
- QuickShip orders must be received with complete and correct catalog numbers.
- Variant request will not qualify for QuickShip program.
- QuickShip orders must be received before 2 pm EST. After 2 pm, shipping will be based on the next business day.
- QuickShip orders are based on standard XAL terms for payment.
- Order change of any type will affect shipping times.
- Partial shipments may be required based on current factory inventory.









Catalog Number Example

BASO2.5-PAT-BL-30K-C80-UNV-010V-0455LF-ST-96IN

A RANGE

BASO 2.5 BASO 2.5

B MOUNTING

os Pendant	PDT
Pendant in-line ACT T-BAR	PAT

G COLOR

QS White	WH
QS Black	BL

O CCT

™ 3000 K	3 0 K
0S 3500 K	3 5 K

(3 CRI

os CRI > 80	C80
OS CRI > 90	C90

VOLTAGE

OS 120V / 277V	UNV

G DIMMING

QS	0-10 V 1%	0	1	0	٧

① OUTPUT LM/FT DOWN

0S 500 lm/ft 100% ↓	0500LF
0S 750 lm/ft 100% ↓	0750LF
0S 1000 lm/ft 100% ↓	1000LF
Custom Im/ft	XXXXLF

custom lumen up to 1200 lm/ft

OUTPUT LM/FT UP

		,	10				
	Custom Im/ft	Χ	Χ	Χ	Χ	L	F
QS	1000 lm/ft ±	1	0	0	0	L	F
QS	750 lm/ft ±	0	7	5	0	L	F
QS	500 lm/ft ±	0	5	0	0	L	F

custom lumen up to 1000 lm/ft

CIRCUIT / EM

QS	Single	circuit	*	t

③ SHAPE / PATTERN

20	Linear	straight	ST
SO.	Lilleal /	Straight	31

DIMENSIONS IN INCH

os Linear 4'	48 I N
os Linear 6'	72 I N
os Linear 8'	96 I N
Custom length	XXFT
(QS in 2' increments only)	






Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIF	RECT / INDIRECT								
e LED	4' linear	35K	16.4 W	1820lm	40% down / 60% up	188 lm/ft	270 lm/ft	72%	111 lm/W
60%	6' linear		24.6 W	2730 lm					
60% 40%	8' linear		32.8 W	3650lm					
e² LED	4' linear	35K	26.8W	3020lm	40% down / 60% up	312 lm/ft	445 lm/ft	72%	112 lm/W
60%	6' linear		40.2 W	4530 lm					
60% ± 40%	8' linear		53.5 W	6040lm					

Patterns top view

Α	FIXTURES	CODE
48"	1'× 4' linear	ST-04FT
96"	1'× 8' linear	ST-08FT
144"	8' + 4' linear	ST - 12FT








DIMENSIONS


BASO 2.5


PENDANT

direct

direct / indirect





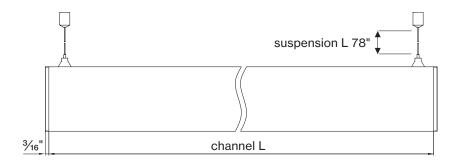



BASO mounting instructions

Get access to the BASO 2.5 mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions/baso

