

T-LINE SPOT 2.5



5 YEAR
limited
led warranty

Catalog Number Example


TL-SPOT2.5-BL-30K-C90-120V-TRIA-2C-15D-1200LM-15W



FEATURES

- Built-In Driver
- 1070 Cold forge aluminum for better heat dissipation
- Adjustable 350°
- 90° Tilt

DIMENSIONS



A PRODUCT

T-LINE T L I N S

F CIRCUIT

Two Circuit-Two Neutral 2 C

B CONFIGURATION

SPOT S P O T 2 . 5

G BEAM SPREAD SPOT 2.5

15° spot	1 5 D
24° medium	2 4 D
36° flood	3 6 D
50° ultra wide flood	5 0 D

C COLOR HEAD

White	W H
Black	B L

H OUTPUT SPOT 2.5

1200 lm 15W 1 2 0 0 L M - 1 5 W

D CCT / CRI

3000 K / CRI > 90	3 0 K - C 9 0
3500 K / CRI > 90	3 5 K - C 9 0


V VOLTAGE

Line Voltage 1 2 0 V


E DIMMING

Triac Dimming T R I A


15° 15W 3000K RA80

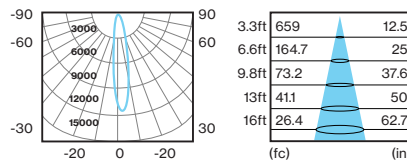


24° 15W 3000K RA80

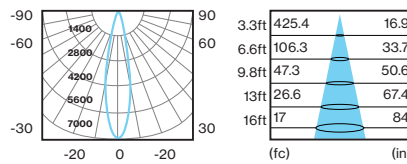

36° 15W 3000K RA80

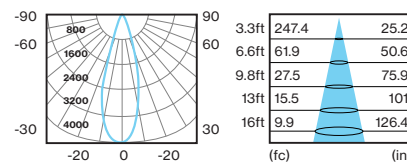

50° 15W 3000K RA80

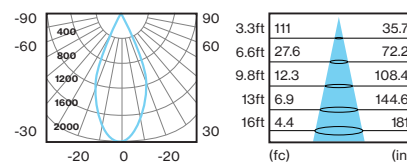

BASO
basolighting.com
xalusa.com