





**Technical data**


	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>BASO DIRECT</b>									
	e LED 2' linear	40K	8.4W	910lm	100% down	455lm/ft	-	66%	108lm/W
	4' linear		16.8W	1820lm					
	6' linear		25.3	2740lm					
	8' linear		33.6W	3640lm					
	e <sup>2</sup> LED 2' linear	40K	14.8W	1500lm	100% down	750lm/ft	-	66%	101lm/W
	4' linear		29.6W	3010lm					
	6' linear		44.6W	4510lm					
	8' linear		59.2W	6020lm					

for 30K or 35K multiply lm value by 0.96

**Patterns top view**



**LINEAR**

A	FIXTURES	CODE
48"	1x 4' linear	ST - 4 8 I N
72"	1x 6' linear	ST - 7 2 I N
96"	1x 8' linear	ST - 9 6 I N





**BASO 2.5 IP 54 Dimensions**

SURFACE  
direct

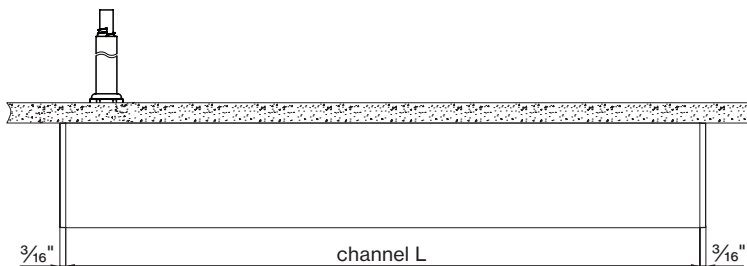

PENDANT  
direct

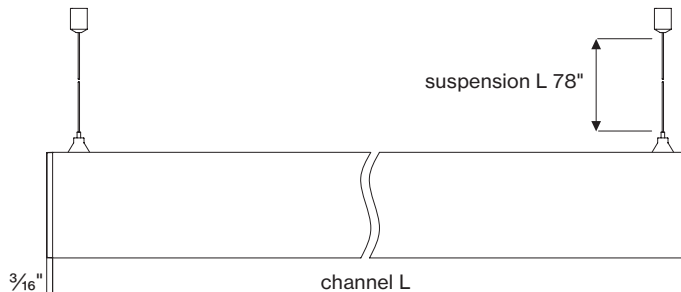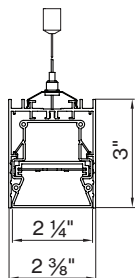

**BASO mounting instructions**

Get access to the BASO 2.5 IP54 mounting instructions faster by scanning the QR code.

[www.xalusa.com/resources/mounting-instructions/baso](http://www.xalusa.com/resources/mounting-instructions/baso)

