



BASO 2.5 WALL WASH

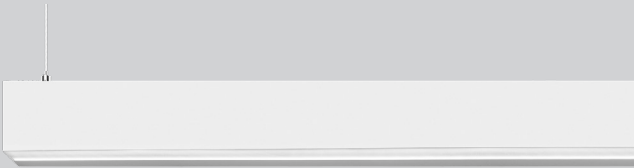

PERFORMANCE

- Up to 125lm/W efficiency
- 400 / 600 / 800lm/ft
- CRI > 80 & CRI > 90
- IC rated & damp rated



MOUNTING

Surface



Pendant



PATTERNS



Rectangular

For customization, please contact customer service


BEAM DISTRIBUTION



Wall to ceiling ratio

Room height	H = 9 ft
Distance to wall	A = 3 ft
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8
Eye level	4 - 5 ft

[link to page](#)

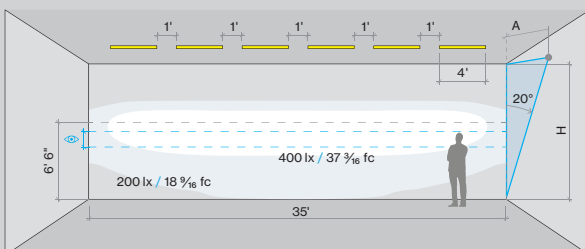

Catalog Number Example

BASO 2.5-PDT-WH-WW-30K-C80-UNV-010V-SEN-0400LF-NLC-ST-24IN

A RANGE

BASO 2.5 BASO 2.5

B MOUNTING

CS Surface SUR
CS Pendant PDT

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black power feeds or junction box covers, please contact customer service

C COLOR

CS White WH
Black BL
Gray GR
Custom color RAL XX

trimless version available in white only

D LENS

Asymmetric wall washer WW

E CCT

2700K 27K
CS 3000K 30K
CS 3500K 35K
4000K 40K

F CRI

CRI > 80 C80
CRI > 90 C90

G VOLTAGE

120V / 277V UNV

H DIMMING

CS 0-10V 1% 010V
Lutron EcoSystem LES1
Quantum, Vive, GRAFIK Eye,
HomeWorks
Power over ethernet POEC
consult customer service for compatibility
Custom dimming XXXX
consult customer service for compatibility

I SENSOR (optional)

Integrated Sensor SEN
consult customer service for sensor request

J OUTPUT LM/FT

CS 500lm/ft 100% ± 0500LF
CS 750lm/ft 100% ± 0750LF
CS 1000lm/ft 100% ± 1000LF
Custom lm/ft XXXXL F
custom lumen up to 1200 lm/ft

K CIRCUIT / EM

CS Single circuit *
EMC night light circuit NLC
EMB available in 4ft and 8ft EM#
* leave blank

L SHAPE / PATTERN

CS Linear / straight ST
L-Shape inner LI
L-Shape outer LO
□-Shape inner RI
□-Shape outer RO
U-Shape inner UI
U-Shape outer UO
Custom shape XX

please contact customer service for availability

M DIMENSIONS IN INCH

Linear 2' 24IN
CS Linear 4' 48IN
CS Linear 6' 72IN
CS Linear 8' 96IN
Linear custom ###IN
L-Shape ###X###IN
U-Shape ###X###X###IN
□-Shape ###X###IN

N CERTIFICATION (optional)

Red List Approved RLA


BASO
basolighting.com
xalusa.com

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT									
e LED	4' linear	40K	12.8W	1600lm	100% down	400lm/ft	-	75%	125lm/W
	8' linear		25.6W	3200lm					
e ² LED	4' linear	40K	20.4W	2400lm	100% down	600lm/ft	-	75%	117lm/W
	8' linear		40.8W	4800lm					
e ²⁺ LED	4' linear	40K	28W	3200lm	100% down	800lm/ft	-	75%	114lm/W
	8' linear		5+W	6400lm					


Patterns top view

LINEAR




A	FIXTURES	CODE
48"	1 x 4' linear	0 4 FT
96"	1 x 8' linear	0 8 FT
144"	3 x 4' linear	1 2 FT

L-SHAPE INNER



A / B	FIXTURES	CODE
48" / 48"	2 x 2' linear + 1 x 2' x 2' corner	0 4 X 0 4 FT
48" / 96"	1 x 2' linear + 1 x 6' linear + 1 x 2' x 2' corner	0 4 X 0 8 FT
96" / 96"	2 x 6' linear + 1 x 2' x 2' corner	0 8 X 0 8 FT

L-SHAPE OUTER





A / B	FIXTURES	CODE
48" / 48"	2 x 2' linear + 1 x 2' x 2' corner	0 4 X 0 4 FT
48" / 96"	1 x 2' linear + 1 x 6' linear + 1 x 2' x 2' corner	0 4 X 0 8 FT
96" / 96"	2 x 6' linear + 1 x 2' x 2' corner	0 8 X 0 8 FT

LIGHT DIRECTION DIAGRAM





Dimensions

SURFACE direct

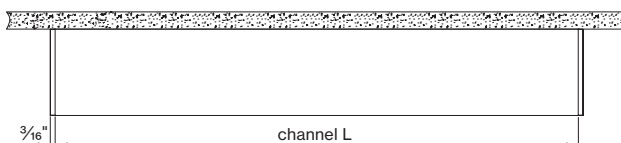

PENDANT direct

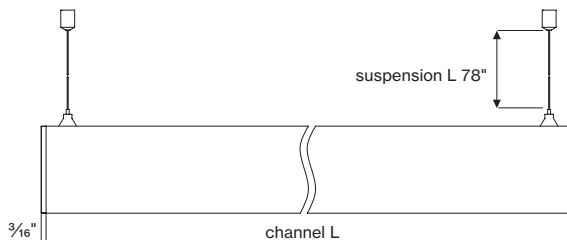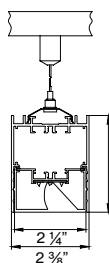

BASO mounting instructions

Get access to the BASO 2.5 WW mounting instructions faster by scanning the QR code.



www.xalusa.com/resources/mounting-instructions/baso