

# M-LINE LINEAR




## PERFORMANCE

- Magnetic inset attachment
- CRI > 90
- End to end capabilities
- 1:3 wall wash ratio

## INSET TYPE

Wallwash



Grazer



Batwing




Opal



Wallwash




Opal Jut Out



## MAKE YOUR ROOM STAND OUT



## MAGNETIC ATTACHMENT

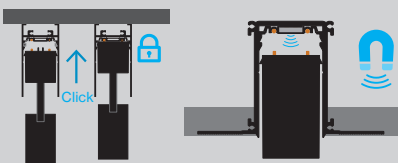

**5 YEAR**  
limited  
led warranty

## Catalog Number Example

MLINS-1.1-WALLW-27K-C90-010V-0510LF-2FT

### A RANGE

M-LINE inset MLINS

### B TRACK TYPE

M-LINE 1.1 1 . 1  
M-LINE 1.2 1 . 2

### C INSET TYPE

Batwing BATWI  
available for 1.1 only  
Grazer GRAZE  
available for 1.1 only  
**CS** Opal jut-out OPALJ  
available for 1.1 only  
Opal flush OPALF  
available for both 1.1 & 1.2  
Wallwasher WALLW  
available for both 1.1 & 1.2

### F DIMMING

**CS** 0-10V 1% single control 010V  
0-10V 1% dual control\* DC10  
\*two 0-10V dimming outputs  
wiring diagram is on power supply page

### G OUTPUT LM/FT

350 lm/ft 0350LF  
Wallwasher  
**CS** 450 lm/ft 0450LF  
Opal flush  
500 lm/ft 0500LF  
Batwing  
510 lm/ft 0510LF  
Grazer  
530 lm/ft 0530LF  
Opal jut-out

### D CCT

2700 K 27K  
**CS** 3000 K 30K  
**CS** 3500 K 35K  
4000 K 40K

### H DIMENSIONS IN FEET

1 foot 6 W 1FT  
**CS** 2 feet 11 W 2FT  
**CS** 4 feet 22 W 4FT  
8 feet 44 W 8FT  
opal flush only

### E CRI

CRI > 90 C90


**BASO**  
basolighting.com  
xalusa.com

### Linear lenses

opal




opal jut-out




wallwasher



batwing



grazer regressed




### M-LINE Mounting Instructions

Get access to the M-LINE mounting instructions faster by scanning the QR code.

<https://www.xalusa.com/resources/mounting-instructions/m-line>



# M-LINE MULTI SPOT

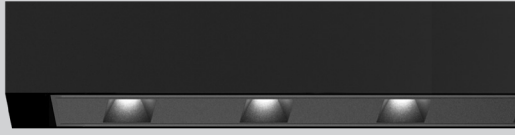


## PERFORMANCE

- Low glare
- Magnetic inset attachment
- CRI > 90
- Quiet illumination high output

## INSET TYPE

Multispot




## MAKE YOUR ROOM STAND OUT



## MAGNETIC ATTACHMENT



[link to video](#)

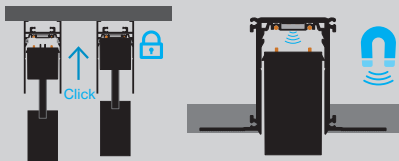

**5 YEAR**  
limited  
led warranty

## Catalog Number Example

MLINS-1.2MULTI-35K-C90-010V-0480LF-2FT

### A RANGE

M-LINE inset                      M L I N S

### B INSET TYPE

31° multi spot                      1 . 2 M U L T I

### C CCT

2700 K                                      2 7 K

**CS** 3000 K                                      3 0 K

**CS** 3500 K                                      3 5 K

4000 K                                      4 0 K

### D CRI

CRI > 90                                      C 9 0

### E DIMMING

**CS** 0-10V 1% single control                      0 1 0 V

0-10V 1% dual control\*                      D C 1 0

\*two 0-10V dimming outputs

wiring diagram is on power supply page

### F OUTPUT LM/FT

480 lm/ft                                      0 4 8 0 L F

31° multi spot

### G DIMENSIONS IN FEET


**CS** 1 foot                      7.2 W                                      1 F T

2 feet                      14.4 W                                      2 F T

**BASO**  
basolighting.com  
xalusa.com

## Linear lenses


opal







wallwasher



multi spot




## Inset distances




### INSET LENGTHS

NOMINAL L	DIMENSIONS
1'	12"
2'	23 13/16"
4'	47 7/16"
8'	94 11/16"

### SIDE VIEW

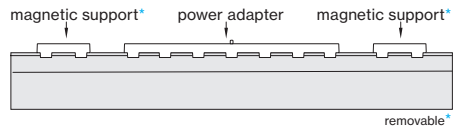

### TOP VIEW

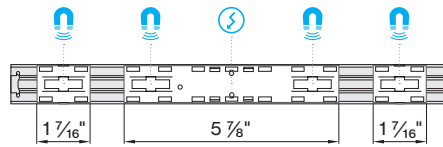

## M-LINE Mounting Instructions

Get access to the M-LINE mounting instructions faster by scanning the QR code.

<https://www.xalusa.com/resources/mounting-instructions/m-line>

