



Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT									
e LED									
	4' linear	35K	17.5W	1820 lm	100% down	455 lm/ft	-	74%	106 lm/W
	6' linear		25.8W	2740 lm					
	8' linear		34.4W	3650 lm					
e² LED									
	4' linear	35K	29.5W	3010 lm	100% down	750 lm/ft	-	74%	102 lm/W
	6' linear		44.2W	4510 lm					
	8' linear		59W	6020 lm					

Patterns top view

LINEAR



A	FIXTURES	CODE
48"	1'x 4' linear	ST - 0 4 FT
96"	1'x 8' linear	ST - 0 8 FT
144"	8'+ 4' linear	ST - 1 2 FT





DIMENSIONS

BASO 2.5


RECESSED trimless

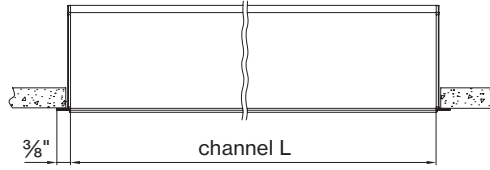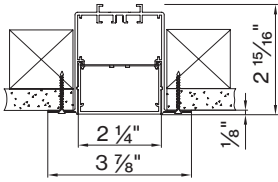


RECESSED with trim

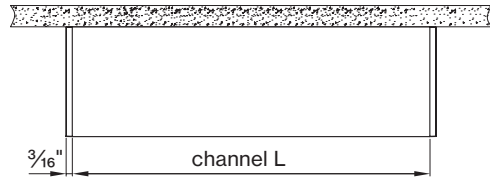


1/16" T-GRID




1/16" Slot Grid (any brand)




1/16" Grid (any brand) 4ft

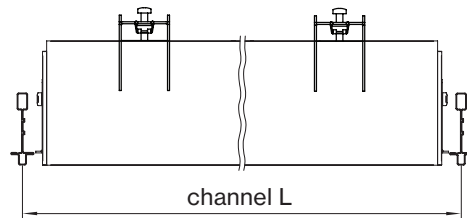

15/16" T-GRID



15/16" Grid (any brand) 4ft

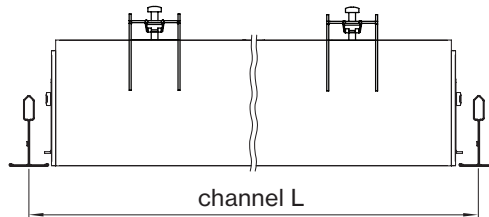

Declare.



BASO mounting instructions

Get access to the BASO 2.5 mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions/baso

