


ROUND

ACOUSTIC INDIRECT




PERFORMANCE

- Welded aluminum fixture housing
- Powder coated white, gray, or black
- CRI > 80 or CRI 90
- Acoustic lay-in cover




MOUNTING

Surface



Pendant




ONE CLICK INSTALLATION

Mounting & electrical connection with one click



[link to video](#)

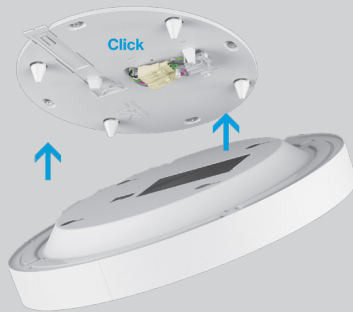

MAKE YOUR ROOM STAND OUT



Catalog Number Example

ROUND-A/I-LI-SUR-BL-AG-40K-C80-UNV-010V-04000LF-DM-2FT

A RANGE

ROUND Acoustic ROUND-A/ I

B SUB CATEGORY

Lay-in acoustic L I

C MOUNTING

Surface SUR
Pendant PDT

D COLOR HOUSING

White WH
Black BL
Gray GR

E COLOR ACOUSTIC

White WH
Light gray LG
Anthracite gray AG

E CCT

CS 2700K 2 7 K
CS 3000K 3 0 K
3500K 3 5 K
4000K 4 0 K

G CRI

CRI > 80 C 8 0
CRI > 90 C 9 0

H VOLTAGE

Universal 120/277 UNV
347 V (only 0-10V dim) 3 4 7

I DIMMING

0-10V 1%	0 1 0 V
DALI	D A L I
Lutron EcoSystem	L E S I
Quantum, Vive, GRAFIK Eye, HomeWorks	
Power over ethernet	P O E C
consult customer service for compatibility	

J OUTPUT LM

Ø 1 1/2'	790lm	0 2 9 0 0 L
	1090lm	0 4 1 0 0 L
Ø 2'	960lm	0 4 0 0 0 L
	1310lm	0 5 4 0 0 L
	1330lm*	0 6 5 0 0 L
Ø 3'	1780lm	0 6 8 0 0 L
	1780lm	0 7 8 0 0 L
	2080lm	1 0 1 0 0 L
	2910lm	1 3 8 0 0 L

item code matches with coordinating
ROUND Direct/Indirect fixture

*only 0-10V and DALI dimming available

K CIRCUIT / EM

Single circuit *

*leave blank

L DIAMETER IN FT

Ø 1 1/2'	DM - 1 . 5 FT
Ø 2'	DM - 2 FT
Ø 3'	DM - 3 FT

BASO
basolighting.com
xalusa.com

Technical data


SIZE TYPE	LED COLOR TEMPERATURE	LIGHT DISTRIBUTION	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	
Ø 1 1/2' gray	30 K, 35 K	100% up	780lm	86%	102 lm/W
	40K		810lm		107 lm/W
	30 K, 35 K	100% up	1090lm		87 lm/W
	40K		1130lm		91 lm/W
Ø 2' gray	30 K, 35 K	100% up	960lm	86%	114 lm/W
	40K		1000lm		118 lm/W
	30 K, 35 K	100% up	1310lm		107 lm/W
	40K		1360lm		111 lm/W
	30 K, 35 K	100% up	1330lm		100 lm/W
Ø 3' gray	40K		1380lm		104 lm/W
	30 K, 35 K	100% up	1780lm	86%	119 lm/W
	40K		1850lm		124 lm/W
	30 K, 35 K	100% up	1780lm		117 lm/W
	40K		1850lm		121 lm/W
	30 K, 35 K	100% up	2080lm		111 lm/W
	40K		2170lm		115 lm/W
	30 K, 35 K	100% up	2800lm		102 lm/W
	40K		2910lm		106 lm/W

Accessory


SUSPENSION SET < 36 INCH

3-piece barrel mount set 6 9 8 - 0 9 8 - 0 5 1 4 0


ROUND 1 1/2' surface

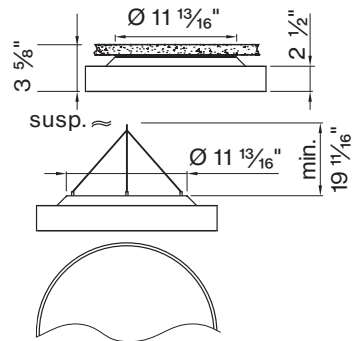

ROUND 2' surface

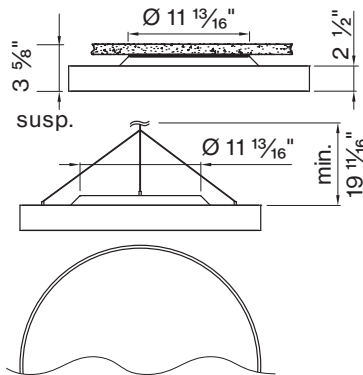

ROUND 3' surface

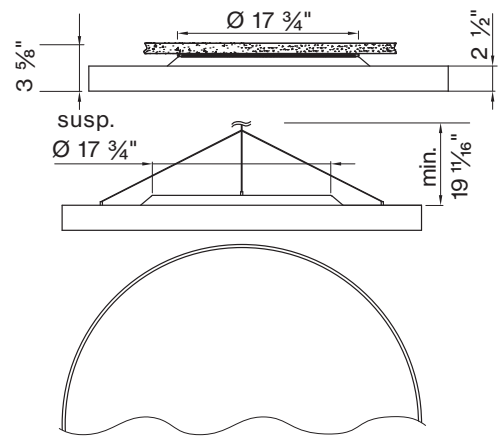

FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
Ø 1 1/2'	Ø 17 3/4" / h 3 1/2"	DM-1.5FT
Ø 2'	Ø 23 5/8" / h 3 1/2"	DM-2FT
Ø 3'	Ø 35 7/16" / h 3 1/2"	DM-3FT

ROUND mounting instructions

Get access to the ROUND mounting instructions faster by scanning the QR code.



www.xalusa.com/resources/mounting-instructions/round