

BASO 2.5 WET DIRECT




5 YEAR
limited
led warranty




PERFORMANCE

- Up to 108 lm/W efficacy
- 455 / 750 lm/ft
- CRI > 80 & CRI > 90
- IP54, wet rated




MOUNTING

Recessed with Trim



DIMENSIONS

TRIM



PROTECTIVE LIGHTING



[link to video](#)



Physical attributes

A RANGE

BASO 2.5 BASO2.5

B SUB CATEGORY

IP54 rated I P

C MOUNTING

Recessed with Trim R T R

D COLOR

White	W H
Black	B L
Gray	G R
Custom color RAL	X X

E LENS

HP opal cover O P

F CCT

3000K	3 0 K
3500K	3 5 K
4000K	4 0 K
Custom CCT	X X K

G CRI

CRI > 80	C 8 0
CRI > 90	C 9 0

Electrical attributes

H VOLTAGE

120V / 277V U N V

I DIMMING

0-10V 1%	0 1 0 V
DALI	D A L I
Lutron EcoSystem	L E S 1
Quantum, Vive, GRAFIK Eye, HomeWorks	
Custom dimming	X X X X
consult customer service for compatibility	

J OUTPUT LM/FT

455lm/ft 100% ±	0 4 5 5 L F
750lm/ft 100% ±	0 7 5 0 L F
Custom lm/ft	X X X X L F

K

CIRCUIT / EM

Single circuit *

Dimensional attributes

L

SHAPE / PATTERN



Linear / straight S T

M

DIMENSIONS IN INCH

Linear 2'	2 4 I N
Linear 3'	3 6 I N
Linear 4'	4 8 I N
Linear 5'	6 0 I N
Linear 6'	7 2 I N
Linear 7'	8 4 I N
Linear 8'	9 6 I N

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
	4' linear	40K	16.8W	1820lm	100% down	455 lm/ft	-	66%	108 lm/W
	8' linear		33.6W	3640lm					
	4' linear	40K	29.6W	3010lm	100% down	750 lm/ft	-	66%	101 lm/W
	8' linear		59.2W	6020lm					

for 30K or 35K multiply lm value by 0.96

Patterns top view



LINEAR

A	FIXTURES	CODE
48"	1x 4' linear	ST - 4 8 I N
72"	1x 6' linear	ST - 7 2 I N
96"	1x 8' linear	ST - 9 6 I N



BASO 2.5 IP 54 Dimensions

RECESSED with trim

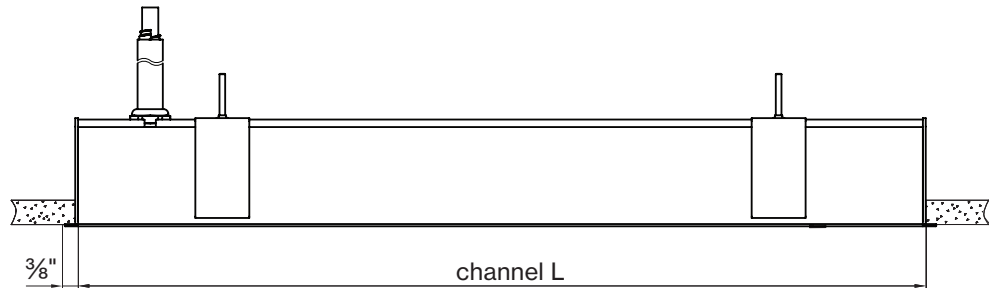

BASO mounting instructions

Get access to the BASO 2.5 IP54 mounting instructions faster by scanning the QR code.



www.xalusa.com/resources/mounting-instructions/baso