


BASO 2.5 WET DIRECT



PERFORMANCE

- Up to 108 lm/W efficiency
- 455 / 750lm/ft
- CRI > 80 & CRI > 90
- IP54, wet rated



MOUNTING

Surface



Pendant



DIMENSIONS

SURFACE

PENDANT



PROTECTIVE LIGHTING



[link to video](#)

Physical attributes

A RANGE

BASO 2.5 BASO2.5

B SUB CATEGORY

IP54 rated I P

B MOUNTING

Surface S U R
Pendant P D T

for black power feeds or junction box covers,
please contact customer service

C COLOR

White W H
Black B L
Gray G R
Custom color RAL X X

D LENS

HP opal cover O P

E CCT

3000K 3 0 K
3500K 3 5 K
4000K 4 0 K
Custom CCT X X K

F CRI

CRI > 80 C 8 0
CRI > 90 C 9 0

Electrical attributes

G VOLTAGE

120V / 277V U N V

H DIMMING

0-10V 1% 0 1 0 V
DALI D A L I
Lutron EcoSystem L E S 1
Quantum, Vive, GRAFIK Eye,
HomeWorks
Custom dimming X X X X
consult customer service for compatibility

I OUTPUT LM/FT

455lm/ft 100% ↓ 0 4 5 5 L F
750lm/ft 100% ↓ 0 7 5 0 L F
Custom lm/ft X X X X L F

J CIRCUIT / EM

Single circuit *

Dimensional attributes



K SHAPE / PATTERN

Linear / straight S T

L DIMENSIONS IN INCH

Linear 2' 2 4 I N
Linear 3' 3 6 I N
Linear 4' 4 8 I N
Linear 5' 6 0 I N
Linear 6' 7 2 I N
Linear 7' 8 4 I N
Linear 8' 9 6 I N

Technical data


	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT									
	e LED 2' linear	40K	8.4W	910lm	100% down	455lm/ft	-	66%	108lm/W
	4' linear		16.8W	1820lm					
	6' linear		25.3	2740lm					
	8' linear		33.6W	3640lm					
	e ² LED 2' linear	40K	14.8W	1500lm	100% down	750lm/ft	-	66%	101lm/W
	4' linear		29.6W	3010lm					
	6' linear		44.6W	4510lm					
	8' linear		59.2W	6020lm					

for 30K or 35K multiply lm value by 0.96

Patterns top view



LINEAR

A	FIXTURES	CODE
48"	1x 4' linear	ST - 4 8 I N
72"	1x 6' linear	ST - 7 2 I N
96"	1x 8' linear	ST - 9 6 I N





BASO 2.5 IP 54 Dimensions

SURFACE
direct

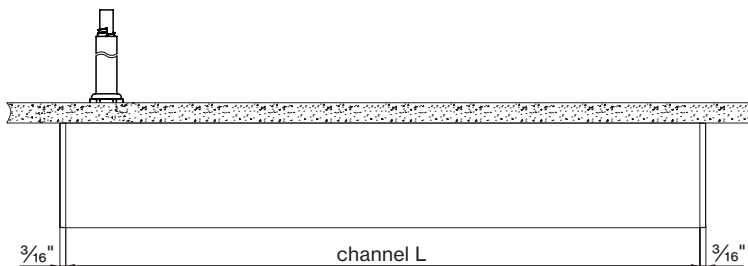

PENDANT
direct

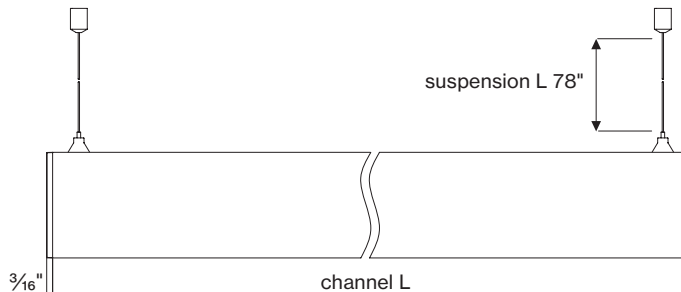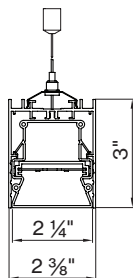

BASO mounting instructions

Get access to the BASO 2.5 IP54 mounting instructions faster by scanning the QR code.



www.xalusa.com/resources/mounting-instructions/baso