



# HEXO EVO

## DIRECT/INDIRECT

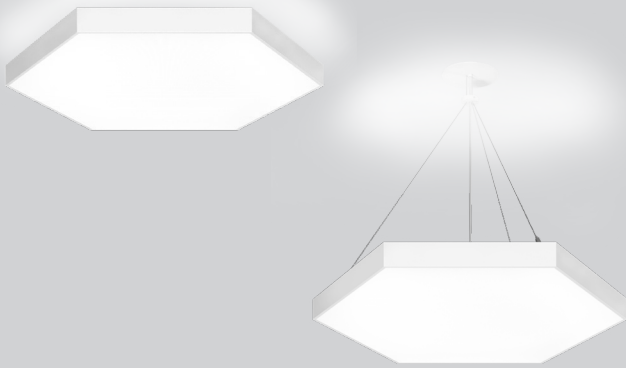

### PERFORMANCE

- Up to 125 lm/W efficiency
- 27 K, 30 K, 35 K, 40 K
- CRI > 80 & CRI > 90




### MOUNTING


Surface



Pendant



### MULTIPLY COMBINATIONS

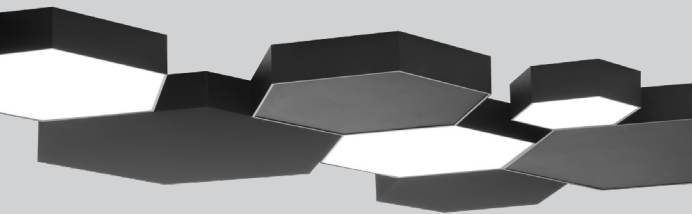


### ONE CLICK INSTALLATION

Mounting & electrical connection with one click



[link to video](#)

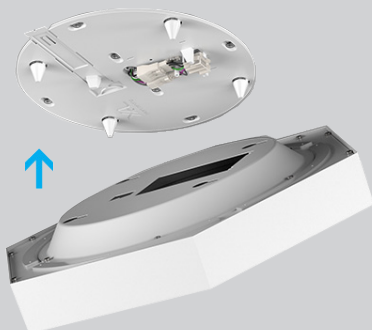

### Catalog Number Example

HEXO-D/I-LM-SUR-BL-OP-35K-C90-UNV-010V-04000L-DM-2FT

#### A RANGE

HEXO EVO      H E X O - D / I

#### H VOLTAGE

120V/277V	U N V
347 V	3 4 7
only 0-10 V dim	

#### B SUB CATEGORY

Luminaire      L M

#### I DIMMING

0-10V 1%	0 1 0 V
DALI	D A L I
Lutron EcoSystem	L E S 1
Quantum, Vive, GRAFIK Eye, HomeWorks	

#### C MOUNTING

Surface	S U R
Pendant	P D T

#### D COLOR

White	W H
Black	B L
Gray	G R

#### J OUTPUT LM

○ 1 1/2'	2900lm	0 2 9 0 0 L
	4100lm	0 4 1 0 0 L
○ 2'	4000lm	0 4 0 0 0 L
	5400lm	0 5 4 0 0 L
	6500lm*	0 6 5 0 0 L
○ 3'	6800lm	0 6 8 0 0 L
	7800lm	0 7 8 0 0 L
	10100lm	1 0 1 0 0 L
	13800lm	1 3 8 0 0 L

\*only 0-10V and DALI dimming available; not compatible with EMP

#### E LENS

Opal cover      O P

#### F CCT

3000K	3 0 K
3500K	3 5 K
4000K	4 0 K

#### G CRI

CRI > 80	C 8 0
CRI > 90	C 9 0

#### K CIRCUIT / EM

Single circuit	*
*leave blank	
EMP EM battery pack	E M 1

EM battery pack only for 120 / 277V option. Lutron only available for DM 3' ≤ 10000lm. No Lutron EM available for DM 1' or DM 2'

#### L DIAMETER IN FT

○ 1 1/2'	D M - 1 . 5 F T
○ 2'	D M - 2 F T
○ 3'	D M - 3 F T

### Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY	
	○ 1 1/2' gray	30K, 35K	28W	2870lm	73% down / 27% up	2090lm	780lm	86%	102lm/W	
		40K		2980lm			2180lm		810lm	107lm/W
		30K, 35K	47W	4070lm	73% down / 27% up	2990lm	1090lm		87lm/W	
			40K		4240lm		3110lm	1130lm	91lm/W	
	○ 2' gray	30K, 35K	35W	4020lm	76% down / 24% up	3060lm	960lm	86%	114lm/W	
		40K		4180lm		3180lm	1000lm		118lm/W	
		30K, 35K	50W	5400lm	76% down / 24% up	4090lm	1310lm		107lm/W	
		40K		5610lm		4250lm	1360lm		111lm/W	
		30K, 35K	64W	6450lm	80% down / 20% up	5110lm	1330lm		100lm/W	
		40K		6710lm		5320lm	1380lm	104lm/W		
	○ Ø 3' gray	30K, 35K	57W	6830lm	74% down / 26% up	5050lm	1780lm	86%	119lm/W	
		40K		7100lm		5250lm	1850lm		124lm/W	
30K, 35K		67W	7800lm	80% down / 20% up	6020lm	1780lm	117lm/W			
40K			8110lm		6250lm	1850lm	121lm/W			
30K, 35K		91W	10130lm	80% down / 20% up	8040lm	2080lm	111lm/W			
40K			10540lm		8360lm	2170lm	115lm/W			
30K, 35K		135W	13790lm	80% down / 20% up	10980lm	2800lm	102lm/W			
	40K		14350lm		11420lm	2910lm	106lm/W			

### Accessory



#### SUSPENSION SET < 36 INCH

3-piece barrel mount set 6 9 8 - 0 9 8 - 0 5 1 4 0



#### FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
○ 1 1/2'	○ 17 3/4" / h 2 1/2"	DM - 1 . 5 F T
○ 2'	○ 23 5/8" / h 2 1/2"	DM - 2 F T
○ 3'	○ 35 7/16" / h 2 1/2"	DM - 3 F T



HEXO EVO 1' surface



HEXO EVO 2' surface



HEXO EVO 3' surface



### HEXO EVO mounting instructions

Get access to the HEXO EVO mounting instructions faster by scanning the QR code.



<https://www.xalusa.com/resources/cut-sheets/hexo-evo>