


# PANO 5.25" WOODWORKS® GRILLE CLASSIC




**5 YEAR**  
limited  
led warranty

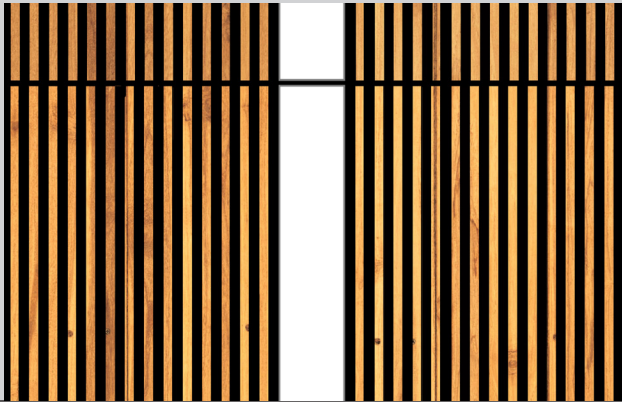


## PERFORMANCE

- Coordinates with Woodworks® Grille ceiling panel
- Up to 124lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated



## WoodWorks® Grille Tegular Ceiling Integration

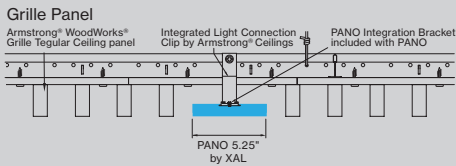

## INTEGRATED DRIVER / REMOTE MOUNTING

Quick and easy electrical connection

### REMOTE MOUNTING



[link to page](#)


## ARMSTRONG CEILING TYPES

WARM, AESTHETIC ROOMS

WT5 - WOODWORKS®  
GRILLE TEGULAR 1 5/16"




WT5 - WOODWORKS®  
GRILLE TEGULAR-VERTICAL SLATS



WLS - WOODWORKS®  
GRILLE SOLID WOOD PANELS



WLV - WOODWORKS® GRILLE  
VENEERED PANELS



## Catalog Number Example

PANO5-WWG-WH-PM-OP-27K-C80-UNV-DALI-0550LF-ST-08FT

### A RANGE

PANO 5.25" PANO 5

### H VOLTAGE

120V / 277V UNV

### B CEILING TYPE

WoodWorks® Grille WWG

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

### I DIMMING

0-10V 1% 0 1 0 V

DALI DALI

Lutron EcoSystem LES 1

Quantum, Vive, GRAFIK Eye, HomeWorks

Power over ethernet POE C

consult customer service for compatibility

Custom dimming X X X X

consult customer service for compatibility

### C COLOR

White WH

Black BL

### D POWER FEED LENGTH

4' standard integrated P S

10' medium remote option P M

30' long remote option P L

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6ft conduit for primary wiring

### J OUTPUT LM/FT

550lm/ft 100% ↓ 0 5 5 0 L F

775lm/ft 100% ↓ 0 7 7 5 L F

1000lm/ft 100% ↓ 1 0 0 0 L F

### K CIRCUIT / EM

Single circuit \*

\* leave blank

### E LENS

HP opal cover O P

### L SHAPE / PATTERN

Linear / straight S T

### F CCT

2700K 2 7 K

3000K 3 0 K

3500K 3 5 K

4000K 4 0 K

Custom CCT X X K

### M DIMENSIONS IN FT

4' fixture 0 4 F T

6' fixture 0 6 F T

8' fixture 0 8 F T

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions

### G CRI

CRI > 80 C 8 0

CRI > 90 C 9 0

xalusa.com


## Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>PANO 5.25"</b>								
e LED	8' opal	40 K	35.4 W	4400lm	100% down	4400lm	81%	124lm/W
e <sup>2</sup> LED	8' opal	40 K	50.5 W	6200lm	100% down	6200lm	81%	123lm/W
e <sup>2+</sup> LED	8' opal	40 K	67.3 W	8000lm	100% down	8000lm	81%	119lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

## WoodWorks® Grille Tegular Ceiling Integration

(for more ceiling options, please see CEILING OPTIONS pages)

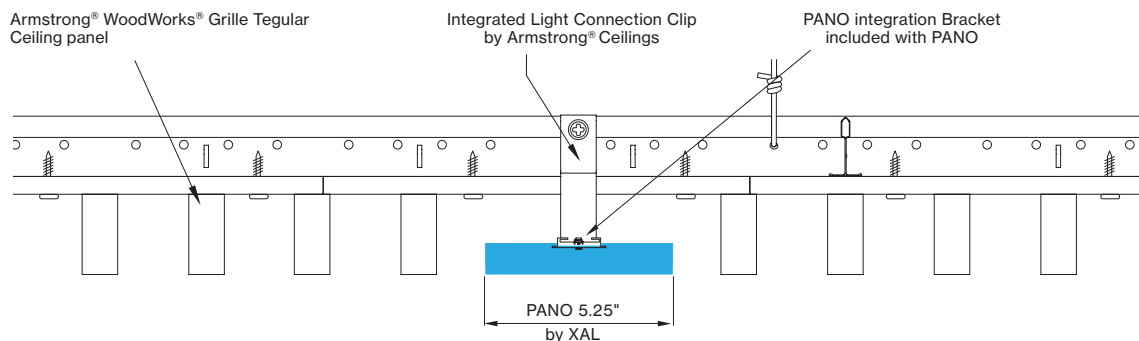

## Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

\*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

## INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light Connection Clip

visit [armstrongceilings.com/linearlighting](http://armstrongceilings.com/linearlighting)

please contact your Armstrong Ceilings rep






## WoodWorks® ceiling systems

XAL PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to [armstrongceilings.com](http://armstrongceilings.com) for installation instructions related to the ceiling products.




DIMENSIONS

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS

WWG view from below

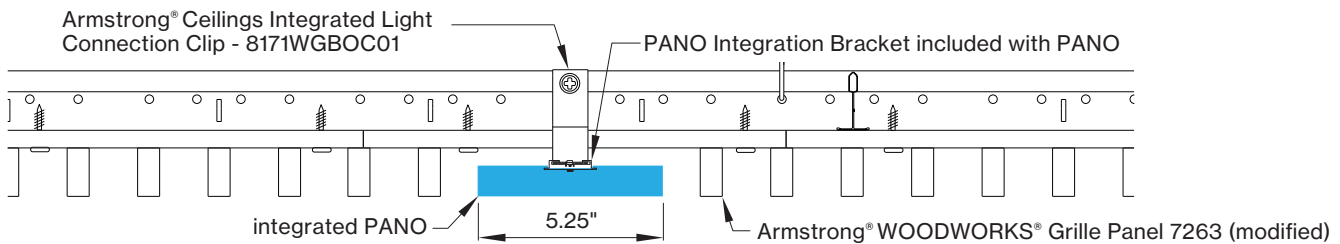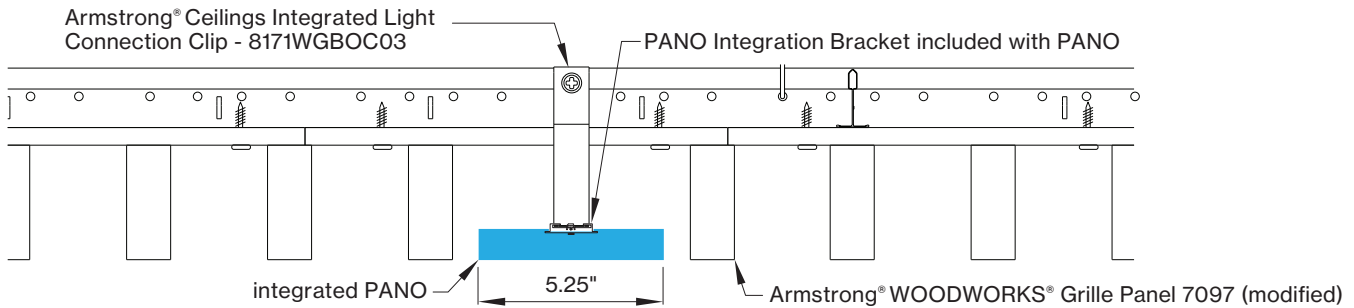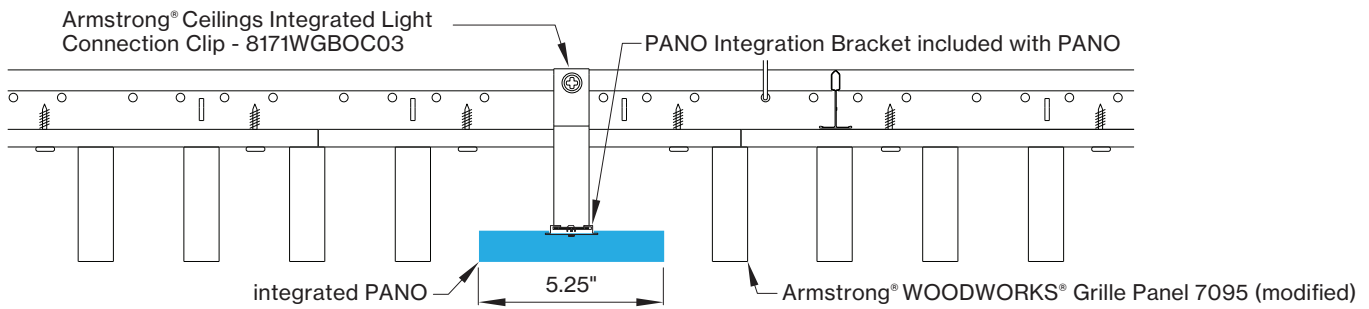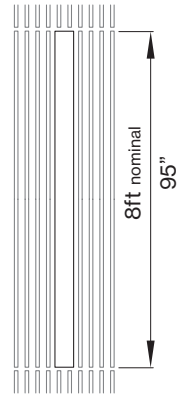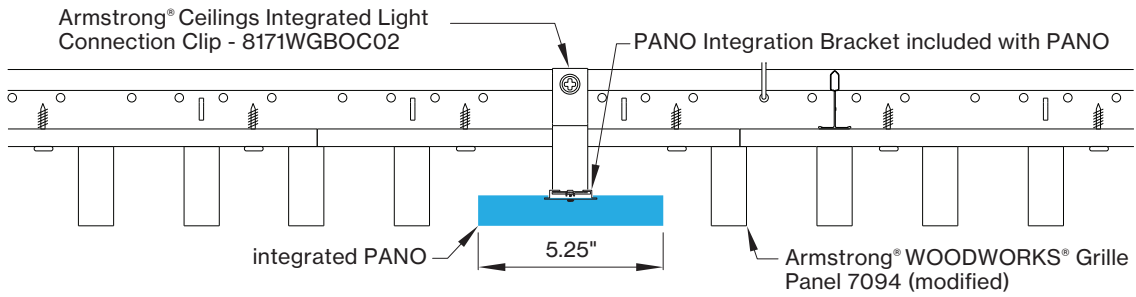

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS cont'd

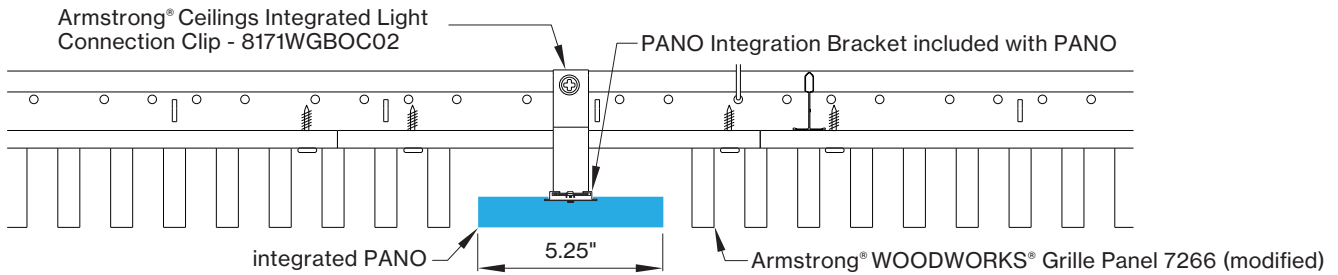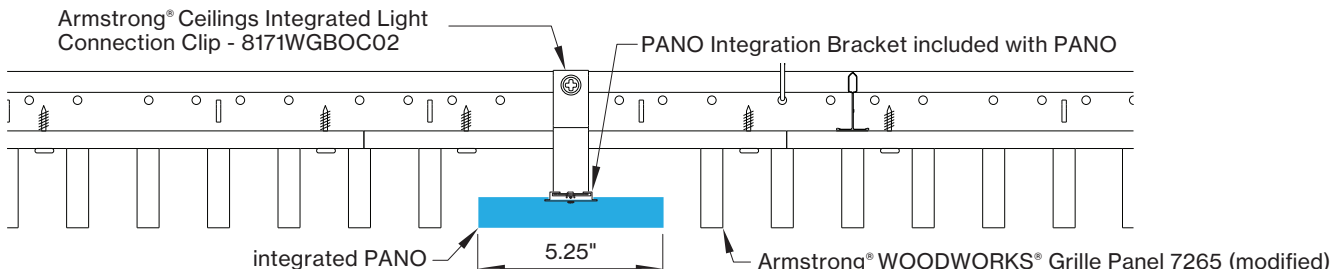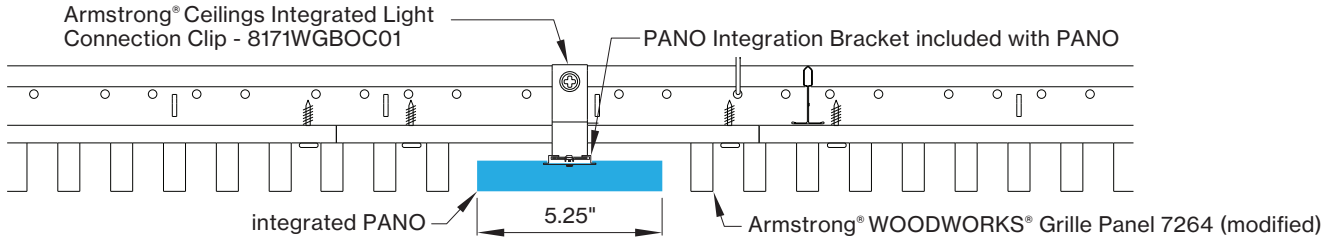

**PANO mounting instructions**

Get access to the PANO mounting instructions faster by scanning the QR code.



<https://www.xalusa.com/resources/cut-sheets/pano>