


R-LINE LINEAR



CONFIGURATIONS

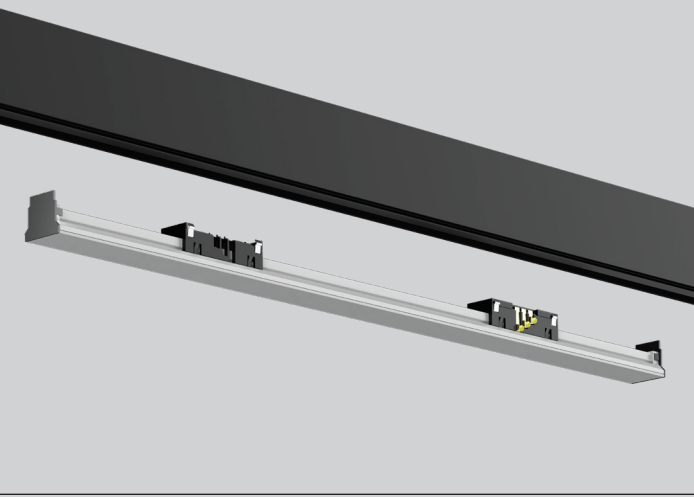

R1 Track



R2 Track



R3 Track

COLORS



Black



White

Catalog Number Example

RLINS-OPAL-1-BL-27K-C90-48V-010V-700LF-10W-04FT-EMC

Attributes

A PRODUCT

R-LINE R L I N S

B PRODUCT

Linear Opal O P A L

C INSET HEIGHT

1" Inset flush with R1/R3 track 1
2" Inset available Q3 2023 2

D ADAPTER COLOR

Black B L
White W H

recommendation: adapter & track color should match

E CCT/CRI

2700K /CRI>90 2 7 K - C 9 0
3000K /CRI>90 3 0 K - C 9 0
3500K /CRI>90 3 5 K - C 9 0

F VOLTAGE

48V low constant voltage 4 8 V
remote driver required (see driver cutsheet)

G DIMMING

0-10V 1% dimming 0 1 0 V

H CIRCUIT

1 or 2 Circuit *
compatible with 1 or 2 track(see driver wiring diagram)
*leave empty

I OUTPUT

300 lm/ft. 5W/ft. 3 0 0 L F - 5 W
700 lm/ft. 10W/ft. 7 0 0 L F - 10 W

J DIMENSION

1 FT 0 1 FT
2 FT 0 2 FT
3 FT 0 3 FT
4 FT 0 4 FT

Optional Accessories

ships separately

K EMERGENCY CIRCUIT

Emergency Circuit Brackets E M C
set of brackets to permanently secure linear opal inset

Other Options

+ LOUVER

see R-Line Louver cutsheet

+ CURVE OPAL

see R-Line Curve Opal cutsheet

+ SPOT CURVE OPAL

see R-Line Spot cutsheet



5 YEAR
limited
led warranty

DIMENSIONS

