


CIRCLE 2.5 DIRECT




PERFORMANCE

- Up to 112lm/W efficiency
- 455 / 750lm/ft
- CRI > 80 & CRI > 90
- Damp rated



MOUNTING

Surface Pendant



WHAT SHAPES YOU?

Combination with BASO 2.5 system components



[link to video](#)



MAKE YOUR ROOM STAND OUT



Physical attributes

A RANGE

CIRCLE 2.5 C I R C L E 2 . 5

B MOUNTING

Surface S U R
Pendant P D T

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black power feeds or junction box covers, please contact customer service

C COLOR

White W H
Black B L
Gray G R
Custom color RAL X X

recessed version available in white only

D LENS

HP opal cover O P

E CCT

3000K 3 0 K
3500K 3 5 K
4000K 4 0 K
Custom CCT X X K

F CRI

CRI > 80 C 8 0
CRI > 90 C 9 0

Electrical attributes

G VOLTAGE

120V / 277V U N V

H DIMMING

0-10V 1% 0 1 0 V

Power over ethernet P O E C
consult customer service for compatibility

I SENSOR (optional)

Integrated Sensor S E N
consult customer service for sensor request

J OUTPUT LM/FT

455 lm/ft 100% ± 0 4 5 5 L F
750 lm/ft 100% ± 0 7 5 0 L F
Custom lm/ft X X X X L F

K CIRCUIT / EM

Single circuit S C
EMC or EMP not available

Dimensional attributes

L DIAMETER IN INCH


Ø36" D M - 3 6 I N
Ø48" D M - 4 8 I N
Ø60" D M - 6 0 I N
Ø72" D M - 7 2 I N
Ø96" D M - 9 6 I N
Ø120" D M - 1 2 0 I N
Ø240" D M - 2 4 0 I N

M CERTIFICATION (optional)

Chicago Plenum C C E A

Technical data

DIRECT




DIAMETER SIZE	LED	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN/FT	OPTICAL EFFICIENCY	POWER CONSUMPTION	LUMINAIRE EFFICACY
D 36"	↓ e LED	40K	81.1W	8595lm	↓ 100%	455 lm/ft	74%	4.3 W/ft	106 lm/W
	↓ e ² LED		139.0W	14180lm		750lm/ft		7.4 W/ft	102lm/W
D 48"	↓ e LED		108.1W	11456lm		455 lm/ft		4.3 W/ft	106 lm/W
	↓ e ² LED		185.4W	18906lm		750lm/ft		7.4 W/ft	102lm/W
D 60"	↓ e LED		135.1W	14319lm		455 lm/ft		4.3 W/ft	106 lm/W
	↓ e ² LED		231.7W	23633lm		750lm/ft		7.4 W/ft	102lm/W
D 72"	↓ e LED		160 W	17183lm		455 lm/ft		4.3 W/ft	106 lm/W
	↓ e ² LED		279W	28455lm		750lm/ft		7.4 W/ft	102lm/W
D 96"	↓ e LED		216 W	22911lm		455 lm/ft		4.3 W/ft	106 lm/W
	↓ e ² LED		372 W	37940lm		750lm/ft		7.4 W/ft	102lm/W
D 120"	↓ e LED		270.2W	28640lm		455 lm/ft		4.3 W/ft	106 lm/W
	↓ e ² LED		463.4W	47265lm		750lm/ft		7.4 W/ft	102lm/W


for 30K or 35K multiply lm value by 0.96

Mounting

SURFACE




PENDANT




DIMENSIONS

CIRCLE 2.5


RECESSED trimless



SURFACE




PENDANT



FULL CIRCLE DIMENSIONS

NOMINAL	ON-CENTER RADIUS	ON-CENTER DIAMETER	OUTSIDE DIAMETER	OUTSIDE CIRCUMFER.
Ø 36"	18"	Ø 36"	Ø 38 3/8"	120 9/16"
Ø 48"	24"	Ø 48"	Ø 50 3/8"	158 1/4"
Ø 60"	30"	Ø 60"	Ø 62 3/8"	196"
Ø 72"	36"	Ø 72"	Ø 74 3/8"	233 5/8"
Ø 96"	48"	Ø 96"	Ø 92 3/8"	306"
Ø 120"	60"	Ø 120"	Ø 122 3/8"	384 7/16"
Ø 240"	120"	Ø 240"	Ø 242 3/8"	761 7/16"

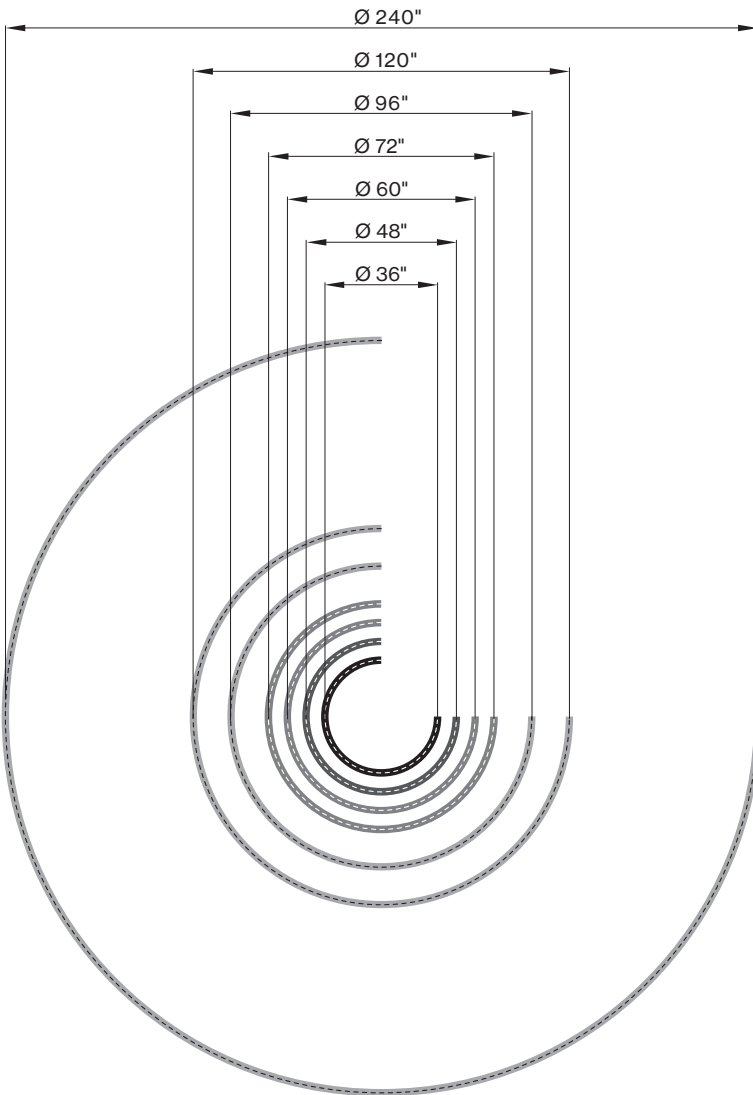

SHAPES mounting instructions

Get access to the SHAPES circle mounting instructions faster by scanning the QR code.



www.xalusa.com/resources/mounting-instructions/shapes