

# VELA EVO

## ACOUSTIC INDIRECT




**5 YEAR**  
limited  
led warranty




### PERFORMANCE

- Welded aluminum fixture housing
- Powder coated white, gray, or black
- CRI > 80 or CRI 90
- Acoustic lay-in cover




### MOUNTING

Surface



Pendant




### ONE CLICK INSTALLATION

Mounting & electrical connection with one click



[link to video](#)

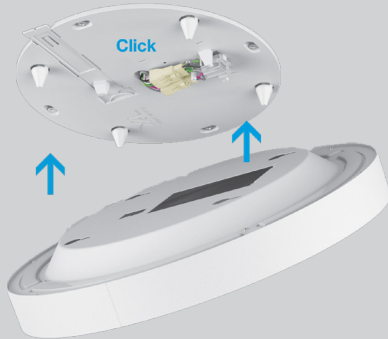

### MAKE YOUR ROOM STAND OUT



### Physical attributes

#### A RANGE

VELA Acoustic V E L A - A / I

#### B SUB CATEGORY

Lay-in acoustic L I

#### C MOUNTING

Surface S U R  
Pendant P D T

#### D COLOR HOUSING

White W H  
Black B L  
Gray G R

#### E COLOR ACOUSTIC

White W H  
Light gray L G  
Anthracite gray A G

#### F CCT

3000K 3 0 K  
3500K 3 5 K  
4000K 4 0 K

#### G CRI

CRI > 80 C 8 0  
CRI > 90 C 9 0

### Dimensional attributes

#### H VOLTAGE

Universal 120 / 277 U N V  
347V (only 0-10V dim) 3 4 7

#### I DIMMING

0-10V 1% 0 1 0 V  
DALI D A L I  
Lutron EcoSystem L E S 1  
Quantum, Vive, GRAFIK Eye,  
HomeWorks  
Power over ethernet P O E C  
consult customer service for compatibility

#### J SENSOR (optional)

Integrated Sensor S E N  
consult customer service for sensor  
request

#### K OUTPUT LM

Ø 1 1/2'	790lm	0 2 9 0 0 L
	1090lm	0 4 1 0 0 L
Ø 2'	960lm	0 4 0 0 0 L
	1310lm	0 5 4 0 0 L
	1330lm*	0 6 5 0 0 L
Ø 3'	1780lm	0 6 8 0 0 L
	1780lm	0 7 8 0 0 L
	2080lm	1 0 1 0 0 L
	2910lm	1 3 8 0 0 L

item code matches with coordinating VELA  
EVO Direct/Indirect fixture

\*only 0-10V and DALI dimming available

#### L CIRCUIT / EM

Single circuit \*  
\*leave blank

#### M DIAMETER IN FT

Ø 1 1/2'	DM - 1 . 5 F T
Ø 2'	DM - 2 F T
Ø 3'	DM - 3 F T

**Technical data**


SIZE TYPE	LED COLOR TEMPERATURE	LIGHT DISTRIBUTION	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
Ø 1½' gray	30K, 35K	100% up	780lm	86%	102lm/W
	40K		810lm		107lm/W
	30K, 35K	100% up	1090lm		87lm/W
	40K		1130lm		91lm/W
Ø 2' gray	30K, 35K	100% up	960lm	86%	114lm/W
	40K		1000lm		118lm/W
	30K, 35K	100% up	1310lm		107lm/W
	40K		1360lm		111lm/W
	30K, 35K	100% up	1330lm		100lm/W
	40K		1380lm		104lm/W
Ø 3' gray	30K, 35K	100% up	1780lm	86%	119lm/W
	40K		1850lm		124lm/W
	30K, 35K	100% up	1780lm		117lm/W
	40K		1850lm		121lm/W
	30K, 35K	100% up	2080lm		111lm/W
	40K		2170lm		115lm/W
	30K, 35K	100% up	2800lm		102lm/W
	40K		2910lm		106lm/W

**Accessory**


**SUSPENSION SET < 36 INCH**

3-piece barrel mount set 6 9 8 - 0 9 8 - 0 5 1 4 0


**VELA EVO 1 ½' surface**

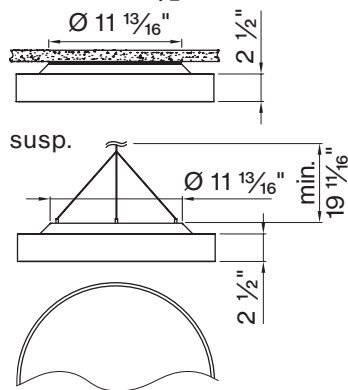

**VELA EVO 2' surface**

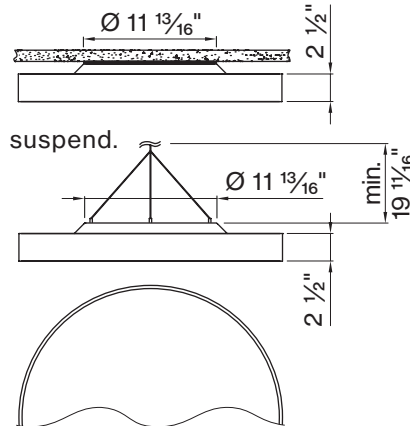

**VELA EVO 3' surface**

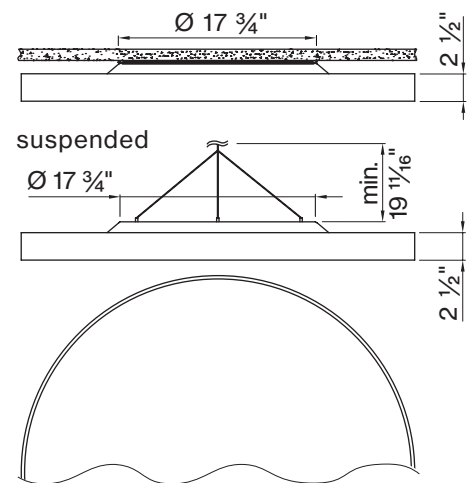

**FIXTURE DIMENSIONS**

NOMINAL	DIMENSIONS	CODE
Ø 1½'	Ø 17 ¾" / h 3 ½"	DM-1.5 FT
Ø 2'	Ø 23 ⅝" / h 3 ½"	DM-2 FT
Ø 3'	Ø 35 ⅞" / h 3 ½"	DM-3 FT

**VELA EVO mounting instructions**

Get access to the Vela Evo mounting instructions faster by scanning the QR code.



[www.xalusa.com/resources/mounting-instructions/vela-evo](http://www.xalusa.com/resources/mounting-instructions/vela-evo)