



X-LITE™

DIRECT

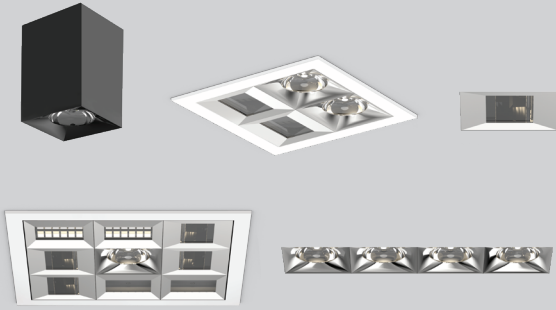


PERFORMANCE


- Up to 70 lm/W
- Multipurpose lighting system
- Multiple lens and housing options
- Recessed, surface, suspended



HOUSING OPTIONS

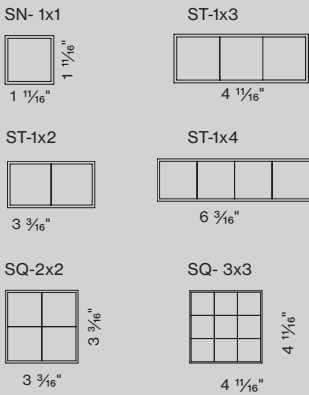


SIDE VIEW



*HEIGHT IS 3" FOR ALL MOUNTING TYPES

DIMENSIONS




CONFIGURATIONS

Various combinations



[link to video](#)

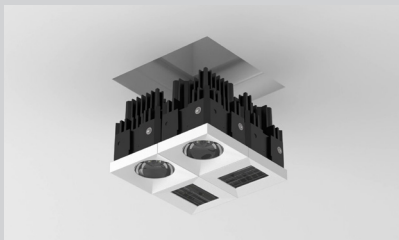

Specification/Instructions

Use the drop downs to select each cells attribute.

1. Select mounting type, housing color, color temperature, and cell color
2. Select Dim Config for cell formation
3. Cell attribute will auto fill depending on selection made for each cell.



Mounting

Housing Color

Color temp

Cell Color

Dim Config.



Cell 1	Cell 2
Lens: <input type="text"/>	Lens: <input type="text"/>
DIM Config: <input type="text"/>	DIM Config: <input type="text"/>
NOTES: <input type="text"/>	NOTES: <input type="text"/>

Cell 3	Cell 4
Lens: <input type="text"/>	Lens: <input type="text"/>
DIM Config: <input type="text"/>	DIM Config: <input type="text"/>
NOTES: <input type="text"/>	NOTES: <input type="text"/>

Attributes Key

Use the housing and cell attributes key.



Housing Attributes Key		Cell Attributes Key	
A RANGE	XLITE	A CELL TRIM COLOR	B G
	XLITE		B M
B PATTERN			C H
	Single 1x1		W G
	Straight 1x2		White Matte
	Straight 1x3		
	Straight 1x4		
	Square 2x2		
	Square 3x3		
C MOUNTING		D CELL LENS	
	Recessed Trimless		Spot 14 deg
	Recessed Trim		Medium 24 deg
	Surface Mounted		Flood 36 deg
	Pendant		Wide 60 deg
			Wall Wash Up
			Wall Wash Down
			Wall Wash Left
			Wall Wash Right
			Blind Cover
D HOUSING COLOR		E CELL COLOR TEMPERATURE	
	White		2700K CRI90
	Black		3000K CRI 90
	Gray		3500K CRI 90
			4000K CRI 90
E DIMMING CHANNEL		F CELL DIMMING CHANNEL	
	single channel		Channel 1
	dual channel		Channel 2
	three channel		Channel 3
	four channel		Channel 4



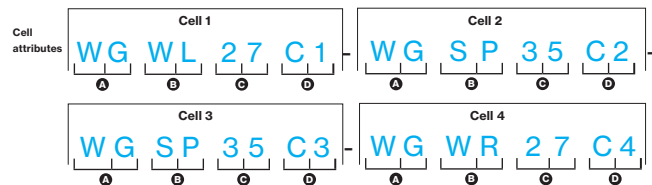


Diagram Example

TOP ROW: Cells 1-2
Cell 1: White Gloss cell color, Wall Wash, light shining left, and 2700K CRI90 temp.
Cell 2: White Gloss, Spotlight, 3500K CRI90 temp.

SECOND ROW: Cells 3-4
Cell 3: White Gloss, Spotlight, 3500K CRI90 temp.
Cell 4: White Gloss cell color, Wall Wash, light shining right, and 2700K CRI90 temp.




BASO
basolighting.com
xalusa.com

X-LITE™

SQ3X3




5 YEAR
limited
led warranty

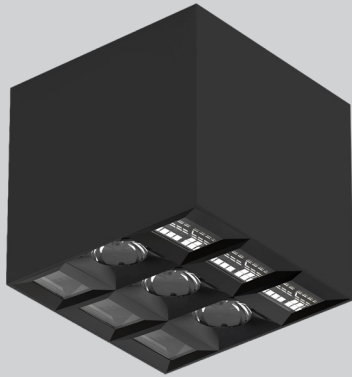


PERFORMANCE

- Up to 118lm/W efficiency
- CRI > 80 & CRI > 90
- IC & Damp rated




DIAGRAM



*Spot and Wallwash cells must have separate dimming channels.


SINGLE CELL LIGHT DISTRIBUTIONS

SPOT LENS 14°




C0: C180
C90: C270
LED array 2.3W / 245lm
106 lm/W

MEDIUM LENS 30°




C0: C180
C90: C270
LED array 2.3W / 225lm
98 lm/W

FLOOD LENS 36°




C0: C180
C90: C270
LED array 2.3W / 235lm
101 lm/W

WIDE LENS 57°



C0: C180
C90: C270
LED array 2.3W / 215lm
93 lm/W

WALL WASH




C0: C180
C90: C270
LED array 4.9 W / 365lm
75 lm/W

CONFIGURATIONS

Various combinations



[link to video](#)

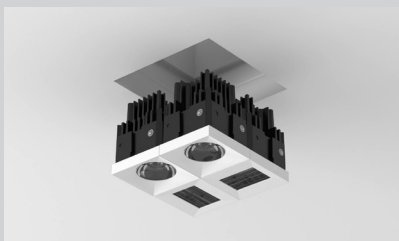

MOUNTING

HOUSING COLOR

*RTL in white only

COLOR TEMP

CELL COLOR

DIM CONFIG.

A	B	C	D		
1 1 1	1 2 1	1 2 3	1 2 1		
1 1 1	1 2 1	1 2 3	2 3 2		
1 1 1	1 2 1	1 2 3	1 2 1		
E	F	G	H	I	J
1 2 1	1 3 3	1 2 3	1 2 3	1 2 3	1 2 1
2 1 2	2 1 3	2 1 2	2 1 2	1 4 3	3 4 3
1 2 1	2 2 1	3 2 1	1 2 3	1 2 3	1 2 1

Cell 1	Cell 2	Cell 3
LENS <input type="text"/>	LENS <input type="text"/>	LENS <input type="text"/>
DIM CONFIG. <input type="text"/>	DIM CONFIG. <input type="text"/>	DIM CONFIG. <input type="text"/>
NOTES <input type="text"/>	NOTES <input type="text"/>	NOTES <input type="text"/>
Cell 4	Cell 5	Cell 6
LENS <input type="text"/>	LENS <input type="text"/>	LENS <input type="text"/>
DIM CONFIG. <input type="text"/>	DIM CONFIG. <input type="text"/>	DIM CONFIG. <input type="text"/>
NOTES <input type="text"/>	NOTES <input type="text"/>	NOTES <input type="text"/>
Cell 7	Cell 8	Cell 9
LENS <input type="text"/>	LENS <input type="text"/>	LENS <input type="text"/>
DIM CONFIG. <input type="text"/>	DIM CONFIG. <input type="text"/>	DIM CONFIG. <input type="text"/>
NOTES <input type="text"/>	NOTES <input type="text"/>	NOTES <input type="text"/>

Housing attributes

XLITE-SQ3x3-

Cell attributes

Cell 1 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	Cell 2 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	Cell 3 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
Cell 4 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	Cell 5 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	Cell 6 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
Cell 7 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	Cell 8 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>	Cell 9 <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>

Housing Configuration Code

XLITEQ90

Cell Configuration Code

XCQ9


Power supply

1. LINE CONTROL

X-LITE 0-10V POWER SUPPLIES

	SPOT CELLS	WALLWASH CELLS
1 cell	XLPS - 12 - SP - 001	XLPS - 12 - WW - 001
2 cell	XLPS - 12 - SP - 002	XLPS - 12 - WW - 002
3 cell	XLPS - 12 - SP - 003	XLPS - 12 - WW - 003
4 cell	XLPS - 12 - SP - 004	XLPS - 12 - WW - 004
5 cell	XLPS - 12 - SP - 005	XLPS - 12 - WW - 005
6 cell	XLPS - 12 - SP - 006	XLPS - 12 - WW - 006
7 cell	XLPS - 12 - SP - 007	XLPS - 12 - WW - 007
8 cell	XLPS - 12 - SP - 008	XLPS - 12 - WW - 008
9 cell	XLPS - 12 - SP - 009	XLPS - 12 - WW - 009


*X-Lite configurations with both Spot and Wallwash cells will need two separate remote drivers




Wiring diagrams

1. LINE CONTROL


0-10V DIM Single Circuit

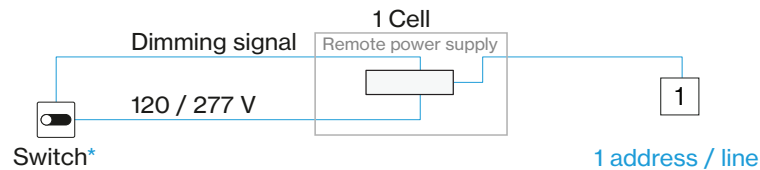

0-10V DIM Dual Circuit

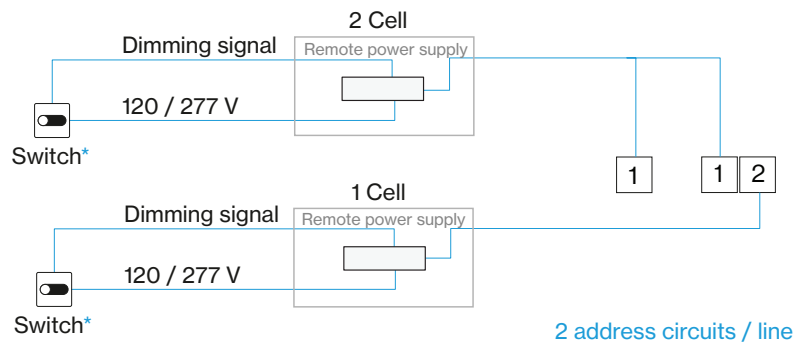


0-10V DIM Tri Circuit

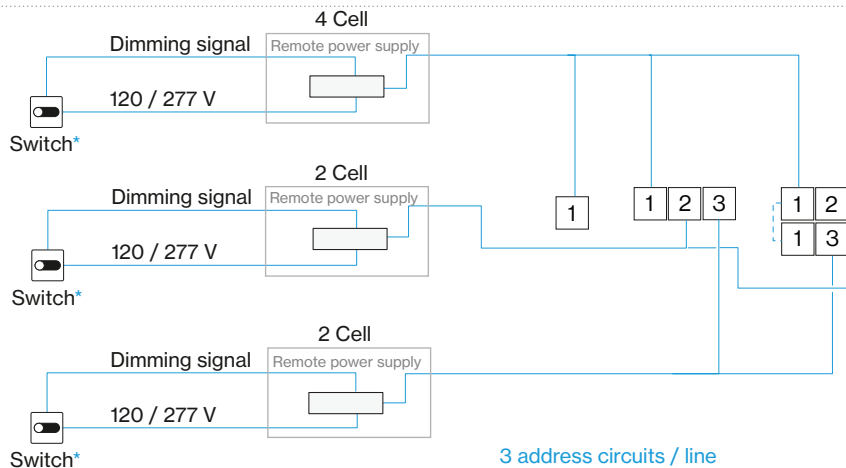

Wiring diagrams continued


0-10V DIM Quad Circuit

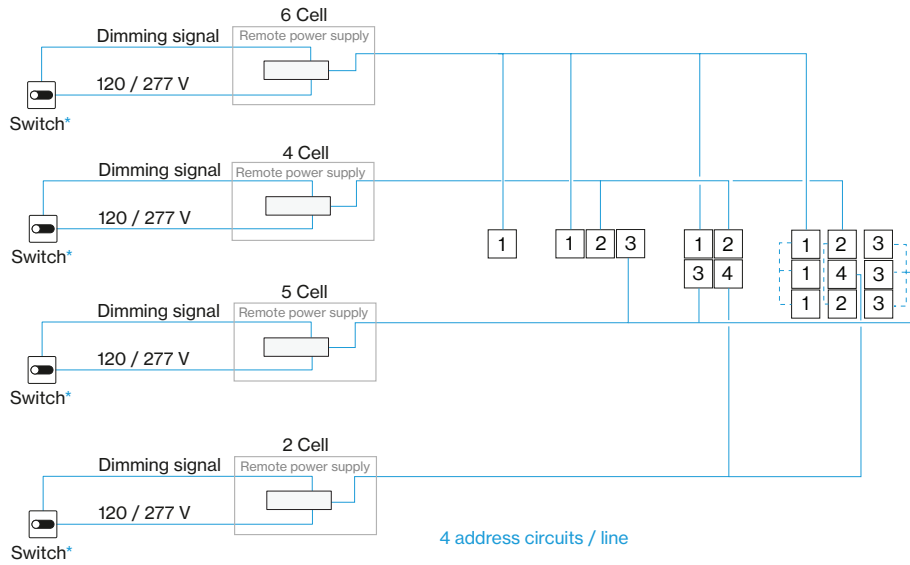

Length range per power supply

POWER SUPPLY

Length A max 150'

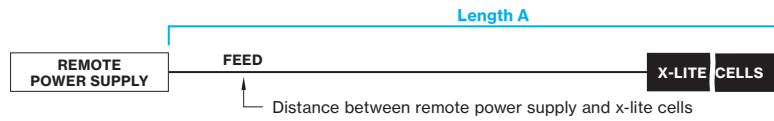

BASO
basolighting.com
xalusa.com

Mounting instructions

Get access to the mounting instructions faster by scanning the QR code.

www.xalusa.com/resources/mounting-instructions

