



CORNER LINEAR RUN

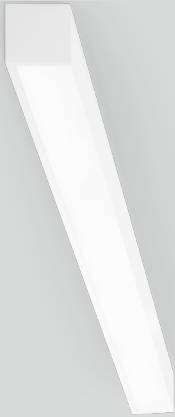


PERFORMANCE

- Bi-Directional light output
- Up to 135lm/W
- CRI > 80 & CRI > 90
- Damp rated




MOUNTING

Surface




DIMENSIONS

down



ceiling slot/cove




FIXTURE LENGTH

L total = L channel + 5/8" in total for two endcaps

VANITY LIGHTING

[link to page](#)

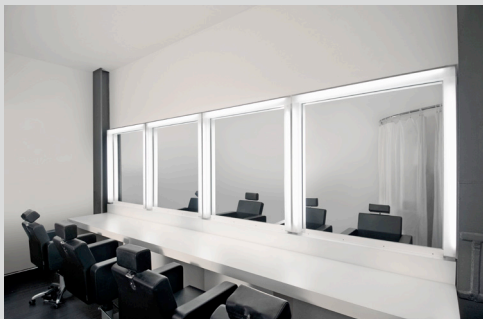

Physical attributes

A RANGE

CORNER CORNER

B MOUNTING

Surface SUR

C COLOR

White WH
Black BL
Grey GR
fine texture powder coated

D LENS

HP opal cover OP

E CCT

3000K 3 0 K
3500K 3 5 K
4000K 4 0 K
Custom CCT x x K

F CRI

CRI > 80 C 8 0
CRI > 90 C 9 0

Electrical attributes

G VOLTAGE

120V / 277V UNV
347V (only 0-10V dim) 3 4 7

H DIMMING

0-10V 1% 0 1 0 V
DALI DAL I
Lutron EcoSystem LES 1
Quantum, Vive, GRAFIK Eye,
HomeWorks

Power over ethernet POEC

consult customer service for compatibility

for custom dimming protocol, please
contact customer service

I OUTPUT LM/FT

470lm/ft 100% ± 0 4 7 0 L F
760lm/ft 100% ± 0 7 6 0 L F
940lm/ft 100% ± 0 9 4 0 L F

for custom lumen packages, please
contact customer service

J CIRCUIT / EM

Single circuit *
EMC night light circuit N L C
EMP EM #
minimum run length 4' or 8'

* leave blank

Dimensional attributes

K SHAPE / PATTERN




Linear ST

L DIMENSIONS IN INCH

Linear 2' 2 4 I N
Linear 4' 4 8 I N
Linear 6' 7 2 I N
Linear 8' 9 6 I N
Linear custom # # I N

dimensions starting at 2' in 1'
increments; for closer increments < 1',
please contact customer service

Technical data



	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
 ↓ e LED	4' linear	40K	14W	1880 lm	83%	135 lm/W
	6' linear		21W	2820 lm		
	8' linear		28W	3760 lm		
 ↓ e ² LED	4' linear	40K	20W	3040 lm	83%	131 lm/W
	6' linear		30W	4560 lm		
	8' linear		40W	6080 lm		
 ↓ e ²⁺ LED	4' linear	40K	28W	3760 lm	83%	122 lm/W
	6' linear		42W	5640 lm		
	8' linear		56W	7520 lm		

for 30K or 35K multiply lm value by 0.96

Mounting

DOWN

FIXTURE LENGTH
 L total = L channel + 5/8" in total for two endcaps

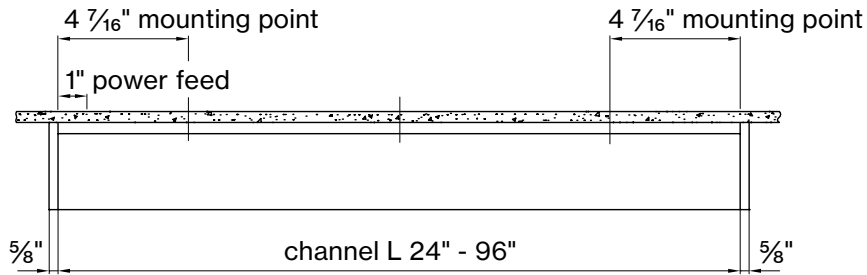

CORNER mounting instructions

Get access to CORNER mounting instructions faster by scanning the QR code.



www.xalusa.com/resources/mounting-instructions/corner